

# STRATFORD MINING COMPLEX

**Monthly Compliance Noise Monitoring  
December 2019**

**Prepared for:**

Stratford Coal Pty Ltd  
PO Box 168  
GLOUCESTER NSW 2422

SLR Ref: 630.11771-R25  
Version No: -v1.0  
January 2020



## PREPARED BY

SLR Consulting Australia Pty Ltd  
ABN 29 001 584 612  
10 Kings Road  
New Lambton NSW 2305 Australia  
(PO Box 447 New Lambton NSW 2305 Australia)  
T: +61 2 4037 3200  
E: newcastleau@slrconsulting.com www.slrconsulting.com

## BASIS OF REPORT

This report has been prepared by SLR Consulting Australia Pty Ltd (SLR) with all reasonable skill, care and diligence, and taking account of the timescale and resources allocated to it by agreement with Stratford Coal Pty Ltd (the Client). Information reported herein is based on the interpretation of data collected, which has been accepted in good faith as being accurate and valid.

This report is for the exclusive use of the Client. No warranties or guarantees are expressed or should be inferred by any third parties. This report may not be relied upon by other parties without written consent from SLR.

SLR disclaims any responsibility to the Client and others in respect of any matters outside the agreed scope of the work.

## DOCUMENT CONTROL

Reference	Date	Prepared	Checked	Authorised
630.11771-R25-v1.0	28 January 2020	Jordan Murray	Martin Davenport	Martin Davenport

## CONTENTS

<b>1</b>	<b>INTRODUCTION .....</b>	<b>5</b>
<b>2</b>	<b>SMC NOISE CRITERIA .....</b>	<b>1</b>
2.1	Project Approval Schedule 3 Environmental Performance Conditions .....	1
2.2	EPL Noise Limits – SMC Operations .....	3
2.3	Noise Limits at the Nominated Attended Noise Monitoring Locations.....	3
2.4	Assessment of Low-frequency Emissions .....	3
2.5	Rail Noise Goals .....	4
<b>3</b>	<b>OPERATIONAL NOISE MONITORING METHODOLOGY .....</b>	<b>4</b>
3.1	General Requirements.....	4
3.2	Operator-attended Noise Monitoring Locations.....	5
<b>4</b>	<b>RESULTS.....</b>	<b>7</b>
4.1	Operator-attended Noise Monitoring - SMC Operational Activity.....	7
4.1.1	Operator-attended Noise Survey Results – ‘Atkins’ .....	8
4.1.2	Operator-attended Noise Survey Results - ‘Clarke’ .....	9
4.1.3	Operator-attended Noise Survey Results - ‘Hall’ .....	10
4.1.4	Operator-attended Noise Survey Results - ‘Lowrey’ .....	11
4.1.5	Operator-attended Noise Survey Results - ‘Pryce-Jones’ .....	12
4.1.6	Operator-attended Noise Survey Results – ‘Van der Drift’ .....	13
4.1.7	Operator-attended Noise Survey Results – ‘Greenwood’ .....	14
4.2	RTNM Verification Monitoring .....	15
4.3	Rail Noise Monitoring .....	15
<b>5</b>	<b>PERFORMANCE ASSESSMENT .....</b>	<b>15</b>
5.1	Operations .....	15
5.2	Sleep Disturbance .....	17
<b>6</b>	<b>CONCLUSION.....</b>	<b>17</b>

## DOCUMENT REFERENCES

### TABLES

Table 1	Noise Limits for the Nominated Noise Monitoring Locations.....	3
Table 2	ARTC EPL 3142 Noise Objectives.....	4
Table 3	SMC Operational Noise Monitoring Locations.....	5
Table 4	Operator-attended Noise Survey Results - ‘Atkins’ .....	8
Table 5	Operator-attended Noise Survey Results - ‘Clarke’ .....	9
Table 6	Operator-attended Noise Survey Results - ‘Hall’ .....	10

---

## CONTENTS

Table 7	Attended Noise Survey Results - 'Lowrey' .....	11
Table 8	Attended Noise Survey Results – 'Pryce Jones' .....	12
Table 9	Attended Noise Survey Results – 'Van der Drift' .....	13
Table 10	Attended Noise Survey Results – 'Greenwood' .....	14
Table 11	Attended Noise Survey Results - Real Time Noise Monitoring Locations.....	15
Table 12	Operator-attended Rail Noise Monitoring Results .....	15
Table 13	Performance Assessment – Operations .....	16
Table 14	Performance Assessment – Sleep Disturbance.....	17

## FIGURES

Figure 1	Stratford Mining Complex Attended Noise Monitoring Locations .....	6
----------	--	---

## APPENDICES

Appendix A	Acoustic Terminology
Appendix B	Operator Attended Noise Survey Charts

# 1 Introduction

*Stratford Coal Pty Limited* (SCPL), a wholly owned subsidiary of Yancoal Australia Limited (Yancoal), has commissioned SLR Consulting Australia Pty Ltd (SLR) to conduct monthly noise monitoring for the Stratford Mining Complex (SMC) operations guided by the requirements of the *Stratford Mining Complex (Stratford Extension Project) Noise Management Plan* (NMP), Document No. NMP-R03-A, dated 17 June 2019. This report presents the results and findings from the operator-attended noise surveys conducted between Thursday 5 December 2019 and Friday 6 December 2019.

It is understood that the SMC collectively comprises the Stratford Coal Mine (SCM), the Bowens Road North Open Cut (BRNOC) and the associated coal processing and handling facilities. Run-of-mine (ROM) coal from the Duralie Coal Mine (DCM) is transported by rail to the SMC, where it is processed along with ROM coal from the SCM and BRNOC. SMC coal is then loaded and railed on the North Coast Railway to the port of Newcastle.

The objectives of the noise monitoring programme for this operating period were as follows:

- Conduct three rounds of external operator-attended noise measurements at the seven nominated locations, representative of receivers in the area surrounding the SMC. The six nominated external operator-attended noise measurement locations are:
  - Atkins – Off Wenhams Cox Road, Stratford
  - Clarke – Off Wenhams Cox Road, Stratford
  - Hall – Upper Avon Road
  - Lowrey – Off Crowthers Road, Stratford
  - Pryce Jones – The Bucketts Way, Craven
  - Van der Drift – Wood Street, Stratford
  - Greenwood – Off Glen Road, Craven

Noise monitoring will occur for a day, evening and night period. The day, evening and night periods being those defined in the NSW *Industrial Noise Policy* (EPA 2000).

- The operator will quantify and characterise the maximum ( $L_{Amax}$ ) and the intrusive ( $L_{Aeq}$  and  $L_{Ceq}$ ) noise level contributions from SMC operations over a 15 minute measurement period. In addition, the operator will quantify and characterise the overall levels of ambient noise (i.e.  $L_{Amax}$ ,  $LA_1$ ,  $LA_{10}$ ,  $LA_{50}$ ,  $LA_{90}$ , and  $L_{Aeq}$ ) over the 15 minute measurement interval.
- Assess the noise emissions of SMC and determine compliance with respect to the limits contained in the NMP.

In addition to monthly noise monitoring at the nominated residential receivers, the NMP requires quarterly noise monitoring of rail activity and verification monitoring of the Real Time Noise Monitor (RTNM) network.

The following report uses specialist acoustic terminology. An explanation of common terms is provided in **Appendix A**.

## 2 SMC Noise Criteria

The figures presented in this Section are extracts from the *Stratford Extension Project (SSD-4966)* Development Consent dated 29 May 2015.

### 2.1 Project Approval Schedule 3 Environmental Performance Conditions

#### ACQUISITION UPON REQUEST

1. Upon receiving a written request for acquisition from an owner of the land listed in Table 1, the Applicant shall acquire the land in accordance with the procedures in conditions 5-6 of Schedule 4.

Table 1: Land subject to acquisition upon request

Property ID	
40/51/Cr1 – L. Blanch	42 – D. Blanch
Cr7 – Pryce-Jones	Cr 2 – Boorer

Note: To interpret the location referred to in Table 1 see the applicable figure in Appendix 5.

However, the obligation to acquire a property does not apply if the Applicant has a negotiated agreement with the owner/s of the relevant land that sets aside acquisition under the terms of this consent, and the Applicant has advised the Department in writing of the terms of this agreement.

#### ADDITIONAL MITIGATION UPON REQUEST

2. Upon receiving a written request from the owner of any residence on the land listed in Tables 1 and 2, the Applicant shall implement additional noise mitigation measures (such as double glazing, insulation, and/or air conditioning) at the residence in consultation with the owner. These measures must be reasonable and feasible and directed towards reducing the noise impacts of the development on the residence.

If within 3 months of receiving this request from the owner, the Applicant and the owner cannot agree on the measures to be implemented, or there is a dispute about the implementation of these measures, then either party may refer the matter to the Secretary for resolution.

Table 2: Land subject to additional noise mitigation upon request

Property ID	Property ID
31(1) – Isaac	60 – Healy / Greenwood
44 – Cross / Jane	36 – Wallace
37 – Worth	29 – Ward
15(3) – Falla	

Note: To interpret the locations referred to in Table 2 see the applicable figure in Appendix 5.

However, the obligation to implement noise mitigation measures does not apply if the Applicant has a negotiated agreement with the owner/s of the relevant residence or land that sets aside noise mitigation measures under the terms of this consent, and the Applicant has advised the Department in writing of the terms of this agreement.

## NOISE

### Hours of Operation

3. The Applicant shall comply with the operating hours in Table 3.

Table 3: Operating hours

Activity	Operating Hours
<ul style="list-style-type: none"> <li>Open cut mining operations in the Bowens Road North and Roseville West Extension pits</li> <li>Recovery and transport of CHPP rejects for re-processing</li> <li>Construction of the noise mitigation bunds on the western side of the Avon North, Roseville West Extension and Stratford East pits</li> </ul>	7 am to 6 pm, 7 days per week
<ul style="list-style-type: none"> <li>Open cut mining operations in the Avon North and Stratford East pits</li> <li>Coal processing, loading and dispatch of product coal trains</li> </ul>	24 hours a day, 7 days per week
<ul style="list-style-type: none"> <li>Maintenance activities</li> </ul>	week

### Noise Criteria

4. The Applicant shall ensure that the noise generated by the development does not exceed the criteria in Table 4 at any residence on privately-owned land.

Table 4: Noise criteria dB(A)

Land	Day $L_{Aeq}(15 \text{ min})$	Evening $L_{Aeq}(15 \text{ min})$	Night $L_{Aeq}(15 \text{ min})$	Night $L_{A1}(1 \text{ min})$
40/51/Cr1 – L. Blanch	43	43	43	50
Cr7 – Pryce-Jones	43	43	43	49
42 – D. Blanch	42	42	42	50
Cr 2 – Boorer	41	41	41	49
31(1) – Isaac	40	40	40	48
36 – Wallace	39	39	39	47
44 – Cross / Jane				
60 – Healy / Greenwood	39	39	39	45
37 – Worth	38	38	38	46
29 – Ward	38	38	37	45
23 – Bagnall	37	37	37	45
31(2) – Isaac				
296 – Watson				
297 – Bosma				
298 – Yates	36	36	36	45
15(3) – Falla	39	35	35	45
15(2) – Falla	36	35	35	45
Stratford Village	37	36	35	45
All other privately-owned residences	35	35	35	45

- To interpret the locations referred to in Table 4 see the applicable figure(s) in Appendix 5.
- Stratford village is shown on the figure(s) in Appendix 5.

Noise generated by the development is to be measured in accordance with the relevant requirements of the *NSW Industrial Noise Policy*. Appendix 6 sets out the meteorological conditions under which these criteria apply and the requirements for evaluating compliance with these criteria.

However, these criteria do not apply if the Applicant has a negotiated agreement with the owner/s of the relevant residence or land to generate higher noise levels, and the Applicant has advised the Department in writing of the terms of this agreement.

1. The noise criteria in Table 4 in Schedule 3 are to apply to a receiver under all meteorological conditions except under:
  - (a) wind speeds greater than 3 m/s at 10 m above ground level; or
  - (b) temperature inversion conditions between 1.5°C and 3°C/100 m and wind speed greater than 2 m/s at 10 m above ground level; or
  - (c) temperature inversion conditions greater than 3°C/100 m.

## 2.2 EPL Noise Limits – SMC Operations

The noise limits specified in EPL 5161 are consistent with the noise criteria specified in SSD-4966.

## 2.3 Noise Limits at the Nominated Attended Noise Monitoring Locations

The site specific noise limits for the six nominated attended noise monitoring locations are summarised in **Table 1**.

**Table 1 Noise Limits for the Nominated Noise Monitoring Locations**

Locality	Intrusiveness Criteria LAeq(15minute)			Night LA1(1minute) Criterion
	Day	Evening	Night	Night
Atkins <sup>1</sup>	35	35	35	45
Clarke <sup>1,2</sup>	37	37	37	45
Hall	35	35	35	45
Lowrey	35	35	35	45
Pryce Jones <sup>3</sup>	43	43	43	49
Van der Drift	37	36	35	45
Greenwood	35	35	35	45

Note 1: Owned by Stratford Coal Pty Ltd

Note 2: Criteria adopted from Bagnall as a guide only and are not definitive at this location.

Note 3: Land subject to acquisition upon request.

## 2.4 Assessment of Low-frequency Emissions

To address the low-frequency noise assessment issues raised in the 2014 Independent Environmental Audit, as outlined in the VIPAC letter (29N-15-0009-TNT-472681-0, dated 26 February 2015), the following analysis of the operator-attended monitoring data was proposed:

*...a full  $L_{Ceq}$  minus  $L_{Aeq}$  spectrum low frequency analysis will be conducted on all noise compliance measurements where the mine noise contribution is deemed to be the dominant noise source. This will be conducted in accordance with the guidance set out in the INP in accordance with the requirements of Development Consent 23-98/99 Schedule 3 Condition 7(a) and Development Consent 39-02-01 Schedule 2 Condition 6.4C(a)(i).*

The low-frequency analysis proposed above shall also serve to meet the *Compliance Monitoring* requirement of Section 5(d) of Appendix 6 *Noise Compliance Assessment* of the Stratford Extension Project Development Consent (SSD-4966, dated 29 May 2015), that states:

*...the use of an appropriate modifying factor for low frequency noise to be applied during compliance testing at any individual residence if low frequency noise is present (in accordance with the INP) and before comparison with the specified noise levels in the consent.*

At all locations weather conditions were either outside of the consented conditions, SMC was not audible and/or significantly below the relevant noise criteria and was therefore low frequency noise was has not been addressed further in this report. The results of the operator attended noise measurements presented in **Section 4**.

## 2.5 Rail Noise Goals

The NMP has adopted ARTC's EPL 3142 noise goals as criteria for the assessment of SMC rail transport noise. The noise objectives specified in ARTC's EPL 3142 apply at 1 m from the façade of affected residential properties and are provided in **Table 2**.

**Table 2** ARTC EPL 3142 Noise Objectives

Descriptor	Rail Traffic Goal dBA
Daytime/Evening LAeq(15hour)	65
Night-time LAeq(9hour)	60
Maximum Pass-by L <sub>Amax</sub>	85

## 3 Operational Noise Monitoring Methodology

### 3.1 General Requirements

All acoustic instrumentation employed throughout the monitoring programme has been designed to comply with the requirements of AS IEC 61672.1 – 2004 *Electroacoustics—Sound level meters – Specifications*, AS IEC 61672.2-2004, AS IEC 61672.3-2004 and carried current NATA or manufacturer calibration certificates. Instrument calibration was checked before and after each measurement survey, with the variation in calibrated levels not exceeding  $\pm 0.5$  dBA.

All operator-attended noise measurements were conducted using a one-third octave integrating Brüel & Kjær Type 2250L (s/n 3003389) together with a Svantek SV30A acoustical calibrator (s/n 39482).

## 3.2 Operator-attended Noise Monitoring Locations

Noise monitoring was conducted in accordance with the requirements of the NMP.


Operator-attended noise measurements were conducted during the day, evening and night-time period for a minimum of 15 minutes per period at each of the six nominated residential noise monitoring locations. The details of the operator-attended SMC operational noise monitoring locations are contained within **Table 3** and shown generally in **Figure 1**. During the operator-attended noise measurements, the character and relative contribution of ambient noise sources and SMC contributions were determined by observations on site.

**Table 3 SMC Operational Noise Monitoring Locations**

Monitoring Location	Receiver Type	Resident / Owner	Monitoring Location - MGA Zone 56	
			Easting (m)	Northing (m)
Atkins	Residence	Atkins	401544	6447134
Clarke	Residence	Clarke	404406	6445783
Hall	Residence	Hall	398269	6443709
Lowrey	Residence	Lowrey	399193	6445879
Pryce Jones	Residence	Pryce Jones	400807	6441846
Van der Drift	Residence	Van der Drift	400171	6445775
Greenwood	Residence	Greenwood	402617	6440457

The objective of the SMC operational operator-attended noise monitoring was to measure the maximum ( $L_{Amax}$ ) and the  $L_{Aeq(15minute)}$  noise level contributions at the nearest potentially affected receptors to determine the noise contribution of mining activities associated with SMC operations over a 15 minute measurement period. During the measurement, the operator also quantifies and characterises the overall levels of ambient noise in the area (i.e.  $L_{Amax}$ ,  $LA1$ ,  $LA10$ ,  $LA90$ , and  $L_{Aeq}$ ) over the 15 minute measurement interval.

Figure 1 Stratford Mining Complex Attended Noise Monitoring Locations

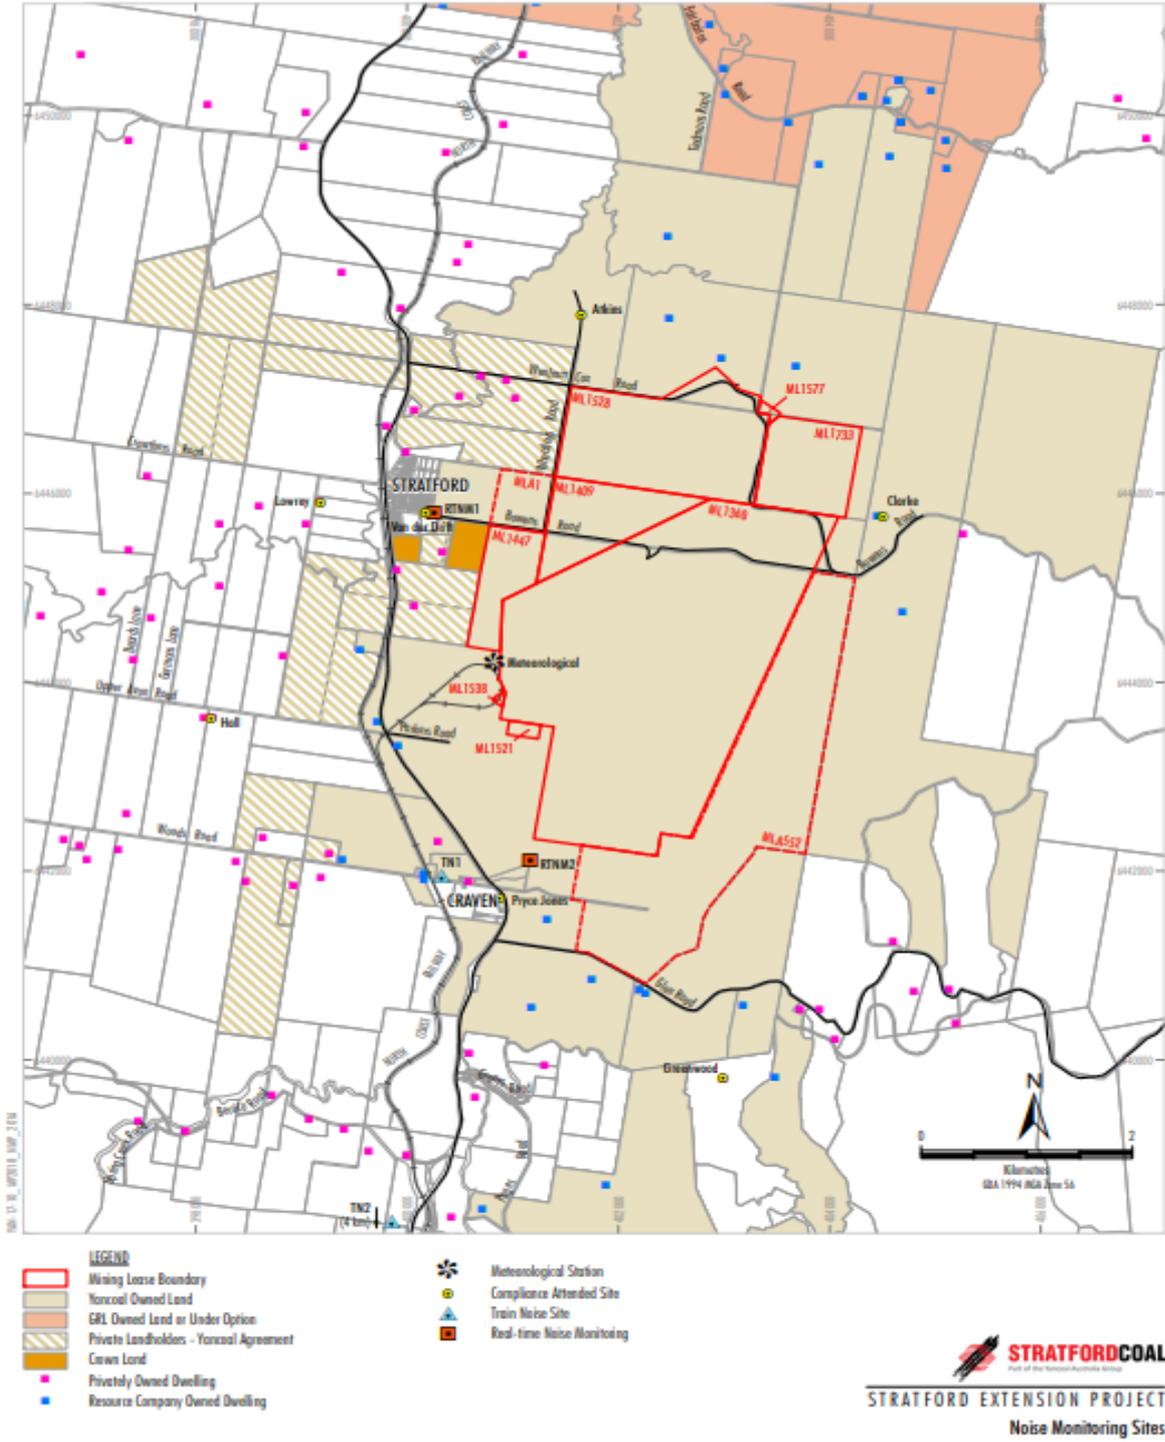

Source: NMP

## 4 Results

### 4.1 Operator-attended Noise Monitoring - SMC Operational Activity

Operator-attended noise measurements were conducted during a day, evening and night period between Thursday 5 December 2019 and Friday 6 December 2019. Results of the operator-attended noise surveys at residential locations are provided in **Sections 4.1.1 to 4.1.7**.

A summary of the results for the attended noise monitoring are displayed graphically in **Appendix B** showing  $L_{Amax}$ ,  $L_{Aeq}$ , and  $L_{Aeq(<1.25kHz)}$  in 1-second intervals throughout the monitoring survey.

Ambient noise levels presented include all noise sources such as transport (roads, rail and aircraft), fauna (insects, frogs, birds, and bats), farm animals (cows, bulls), the natural environment (wind, wind in trees), domestic noises, other industrial operations as well as SMC noise emissions.

Weather data during the monitoring period has been obtained from the weather station located on the SMC site.

The tables provide the following information:

- Date and start time, operator and equipment details.
- Monitoring location.
- Wind velocity (m/s) and temperature (°C) at the measurement location.
- Typical maximum ( $L_{Amax}$ ) and contributed  $L_{Aeq(15minute)}$  noise levels.

#### 4.1.1 Operator-attended Noise Survey Results – ‘Atkins’

Results of the operator-attended noise surveys at ‘Atkins’ are provided in **Table 4**. Monitoring location ‘Atkins’ represents residential receptors located to the north of the site.

**Table 4 Operator-attended Noise Survey Results - ‘Atkins’**

Atkins	Date/Start Time/ Weather	Primary Noise Descriptor dBA (15 minute)						Description of Noise Emissions and Typical Maximum Noise Levels (dBA)
		L <sub>Amax</sub>	L <sub>A1</sub>	L <sub>A10</sub>	L <sub>A90</sub>	L <sub>Aeq</sub>	L <sub>Aeq</sub> (≤1.25kHz)	
Day	05/12/2019 15:45 36°C 5.5 m/s NW	69	61	54	30	50	50	<i>Site related noise events:</i> <b>SMC: Inaudible</b> <i>Other noise events:</i> Wind related noise 38-45 Birds 49-69
Evening	05/12/2019 19:35 32°C 4.5 m/s W	45	37	33	24	30	29	<i>Site related noise events:</i> General mining operations 22-26 <b>L<sub>Aeq</sub>(15minute) contribution 25 dBA</b> <i>Other noise events:</i> Wind 27-33 Insects 25 Birds 43-45
Night	06/12/2019 00:37 22°C 2 m/s NE	65	38	34	22	32	31	<i>Site related noise events:</i> <b>SMC: Inaudible</b> <i>Other noise events:</i> Wind 26-33 Cows 60-65 Insects 20-23

SMC operations were inaudible during the day and night-time operator-attended surveys and audible during the evening at this location. The SMC generated L<sub>Aeq</sub>(15minute) noise contributions of 25 dBA during the evening survey.

#### 4.1.2 Operator-attended Noise Survey Results - 'Clarke'

Results of the operator-attended noise surveys at 'Clarke' are provided in **Table 5**. Monitoring location 'Clarke' represents residential receptors located to the east of the site, and is a SMC owned property. The monitoring results at Clarke are used to determine SMC contributions at the 'Bagnall' residence located further to the east.

**Table 5 Operator-attended Noise Survey Results - 'Clarke'**

Clarke	Date/Start Time/ Weather	Primary Noise Descriptor dBA (15 minute)						Description of Noise Emissions and Typical Maximum Noise Levels (dBA)
		L <sub>Amax</sub>	L <sub>A1</sub>	L <sub>A10</sub>	L <sub>A90</sub>	L <sub>Aeq</sub>	L <sub>Aeq</sub> (≤1.25kHz)	
Day	05/12/2019 15:22 35°C 3.5 m/s SW	61	54	50	42	47	47	<i>Site related noise events:</i> <b>SMC: Audible</b> General mining operations 43-47 <b>L<sub>Aeq</sub>(15minute) contribution 45 dBA</b> <i>Other noise events:</i> Wind 41-47 Birds 40-61
Evening	05/12/2019 19:08 33°C 5.5 m/s W	56	51	48	42	46	46	<i>Site related noise events:</i> <b>SMC: Audible</b> General mining operations 39-46 <b>L<sub>Aeq</sub>(15minute) contribution 44 dBA</b> <i>Other noise events:</i> Insects 34-36 Wind related noise 39-43 Birds 50-56
Night	06/12/2019 00:13 23°C 2 m/s NE	53	49	46	41	44	44	<i>Site related noise events:</i> <b>SMC: Audible</b> General mining operations 40-45 Rock dump 53 <b>L<sub>Aeq</sub>(15minute) contribution 44 dBA</b> <b>L<sub>Amax</sub> contribution 53 dBA</b> <i>Other noise events:</i> Insects 33 Wind 35-39

SMC operations were inaudible during the day and audible during the day, evening and night-time operator-attended surveys. SMC operations generated an L<sub>Aeq</sub>(15minute) noise contribution of 45 dBA during the day, 44 dBA during the evening and 44 dBA during the night-time. During the night time period the operation of the pit generated L<sub>Amax</sub> noise levels of up to 53 dBA at the monitoring location.

Noise levels were predicted to the Bagnall residence using an ENM model. The noise model was calibrated using the operator attended noise monitoring results and weather conditions at the Clarke noise monitoring location. L<sub>Aeq</sub>(15minute) noise levels are predicted to be 32 dBA, 34 dBA and 31 dBA, during the day, evening and night time, respectively. The night time L<sub>Amax</sub> noise level is predicted to be 40 dBA.

### 4.1.3 Operator-attended Noise Survey Results - 'Hall'

Results of the operator-attended noise surveys at 'Hall' are provided in **Table 6**. Monitoring location 'Hall' represents residential receptors located to the southwest of the site.

**Table 6 Operator-attended Noise Survey Results - 'Hall'**

Hall	Date/Start Time/ Weather	Primary Noise Descriptor dBA (15 minute)						Description of Noise Emissions and Typical Maximum Noise Levels (dBA)
		L <sub>Amax</sub>	L <sub>A1</sub>	L <sub>A10</sub>	L <sub>A90</sub>	L <sub>Aeq</sub>	L <sub>Aeq</sub> (≤1.25kHz)	
Day	05/12/2019 13:26 33°C 4 m/s SSW	63	50	46	26	42	34	<i>Site related noise events:</i> <b>SMC: Inaudible</b> <i>Other noise events:</i> Road traffic 40-63 Birds 42-58 Wind related noise 27-30
Evening	05/12/2019 20:43 30°C 3 m/s SW	49	46	42	32	39	28	<i>Site related noise events:</i> <b>SMC: Inaudible</b> <i>Other noise events:</i> Insects 34-36- Wind 40-49
Night	05/12/2019 23:00 26°C 1 m/s NW	62	40	34	27	33	24	<i>Site related noise events:</i> <b>SMC: Inaudible</b> <i>Other noise events:</i> Bat 62 Wind 30-35 Insects 28-31-

SMC operations were inaudible during the day, evening and night-time operator attended noise surveys at this location.

#### 4.1.4 Operator-attended Noise Survey Results - 'Lowrey'

Results of the operator-attended noise surveys at 'Lowrey' are provided in **Table 7**. Monitoring location 'Lowrey' represents residential receptors located to the west of the site and west of Bucketts Way.

**Table 7** Attended Noise Survey Results - 'Lowrey'

Lowrey	Date/Start Time/ Weather	Primary Noise Descriptor dBA (15 minute)						Description of Noise Emissions and Typical Maximum Noise Levels (dBA)
		L <sub>Amax</sub>	L <sub>A1</sub>	L <sub>A10</sub>	L <sub>A90</sub>	L <sub>Aeq</sub>	L <sub>Aeq</sub> (≤1.25kHz)	
Day	05/12/2019 14:56 35°C 5.5 m/s SW	64	48	38	29	37	35	<i>Site related noise events:</i> <b>SMC: Inaudible</b> <i>Other noise events:</i> Road traffic 32-40 Cows 41-56 Roadworks 31-35 Birds 51-64
Evening	05/12/2019 19:59 31°C 4 m/s WSW	56	42	32	25	32	31	<i>Site related noise events:</i> <b>SMC: Inaudible</b> <i>Other noise events:</i> Road traffic 33-38 Cows 42-56 Insects 29-31 Wind 35-41
Night	05/12/2019 23:47 23°C 2 m/s ENE	46	41	33	21	30	28	<i>Site related noise events:</i> <b>SMC: Inaudible</b> <i>Other noise events:</i> Dogs 40-46 insects 27-30

SMC operations were inaudible during all operator attended noise surveys at this location.

#### 4.1.5 Operator-attended Noise Survey Results - 'Pryce-Jones'

Results of the operator-attended noise surveys at 'Pryce Jones' are provided in **Table 8**. Monitoring location 'Pryce Jones' represents residential receptors located in Craven to the south of the site.

**Table 8** Attended Noise Survey Results – 'Pryce Jones'

Pryce-Jones	Date/Start Time/ Weather	Primary Noise Descriptor dBA (15 minute)						Description of Noise Emissions and Typical Maximum Noise Levels (dBA)
		L <sub>Amax</sub>	L <sub>A1</sub>	L <sub>A10</sub>	L <sub>A90</sub>	L <sub>Aeq</sub>	L <sub>Aeq</sub> (≤1.25kHz)	
Day	05/12/2019 11:40 30°C 3.5 m/s SSW	98	80	71	30	70	68	<i>Site related noise events:</i> <b>SMC: Inaudible</b> <i>Other noise events:</i> Road traffic 49-98 Birds 44-63
Evening	05/12/2019 21:05 30°C 3 m/s SSW	70	65	53	35	52	51	<i>Site related noise events:</i> <b>SMC: Inaudible</b> <i>Other noise events:</i> Road traffic 45-70 Insects 34-36 Wind related noise 32-40
Night	05/12/2019 22:13 28°C 2 m/s W	77	68	50	29	54	53	<i>Site related noise events:</i> <b>SMC: Audible</b> General mining operations 31-34 <b>L<sub>Aeq</sub>(15minute) contribution</b> <b>32 dBA</b> <b>L<sub>Amax</sub> contribution</b> <b>34 dBA</b> <i>Other noise events:</i> Road traffic 49-77 Insects 28-29

SMC operations were inaudible during the day and evening and audible during night-time period survey at this location. The SMC generated L<sub>Aeq</sub>(15minute) noise contributions of 32 dBA during the night-time with L<sub>Amax</sub> noise levels of 34 dBA.

#### 4.1.6 Operator-attended Noise Survey Results – ‘Van der Drift’

Results of the operator-attended noise surveys at ‘Van der Drift’ are provided in **Table 9**.

**Table 9 Attended Noise Survey Results – ‘Van der Drift’**

Van der Drift	Date/Start Time/ Weather	Primary Noise Descriptor dBA (15 minute)						Description of Noise Emissions and Typical Maximum Noise Levels (dBA)
		L <sub>Amax</sub>	L <sub>A1</sub>	L <sub>A10</sub>	L <sub>A90</sub>	L <sub>Aeq</sub>	L <sub>Aeq</sub> (≤1.25kHz)	
Day	05/12/2019 13:56 34°C 4 m/s N	73	56	45	31	45	44	<i>Site related noise events:</i> <b>SMC: Inaudible</b> <i>Other noise events:</i> Road traffic 42-73 Roadworks 42-46 Birds 38-55 Wind in trees 30-35
Evening	05/12/2019 20:20 30°C 2.5 m/s WSW	44	40	37	25	33	32	<i>Site related noise events:</i> <b>SMC: Audible</b> General mining operations 29-31 <b>L<sub>Aeq</sub>(15minute) contribution 30 dBA</b> <i>Other noise events:</i> Road traffic 33-42 Insects 24-26 Wind 30-37
Night	05/12/2019 23:24 23°C 1 m/s ENE	48	45	38	22	33	33	<i>Site related noise events:</i> <b>SMC: Audible</b> General operations 21-25 <b>L<sub>Aeq</sub>(15minute) Contribution 23 dBA</b> <b>L<sub>Amax</sub> Contribution 25 dBA</b> <i>Other noise events:</i> Road traffic 37-48 Insects 27-30

SMC operations were inaudible during the day and audible during the evening and night-time operator attended noise surveys at this location. SMC operations generated L<sub>Aeq</sub>(15minute) noise levels of 30 dBA during the evening and 23 dBA during the night-time period. L<sub>Amax</sub> noise levels of 25 dBA were measured during the night-time survey.

#### 4.1.7 Operator-attended Noise Survey Results – ‘Greenwood’

Results of the operator-attended noise surveys at ‘Greenwood’ are provided in **Table 10**.

**Table 10 Attended Noise Survey Results – ‘Greenwood’**

Greenwood	Date/Start Time/ Weather	Primary Noise Descriptor dBA (15 minute)						Description of Noise Emissions and Typical Maximum Noise Levels (dBA)
		L <sub>Amax</sub>	L <sub>A1</sub>	L <sub>A10</sub>	L <sub>A90</sub>	L <sub>Aeq</sub>	L <sub>Aeq</sub> (≤1.25kHz)	
Day	05/12/2019 13:03 33°C 3 m/s WSW	78	74	62	36	61	60	<i>Site related noise events:</i> <b>SMC: Inaudible</b> <i>Other noise events:</i> Wind related noise 33-39 Birds 39-78
Evening	05/12/2019 21:27 28°C 2 m/s W	56	50	46	34	42	38	<i>Site related noise events:</i> <b>SMC: Inaudible</b> <i>Other noise events:</i> Insects 30-33 Wind 34-40 Plane 42-56
Night	05/12/2019 22:35 28°C 1.5 m/s W	50	42	39	33	36	26	<i>Site related noise events:</i> <b>SMC: Inaudible</b> <i>Other noise events:</i> Wind 29-37 Insects 30-33 Animal 50

SMC operations were inaudible during all operator-attended noise surveys at this location.

## 4.2 RTNM Verification Monitoring

Results of the operator-attended noise surveys at 'RTNM1' and 'RTNM2' are provided in

**Table 11 Attended Noise Survey Results - Real Time Noise Monitoring Locations**

Location and Period	Date/Start Time/ Weather	Primary Noise Descriptor dBA (15 minute)						Description of Noise Emissions and Typical Maximum Noise Levels (dBA)
		L <sub>Amax</sub>	L <sub>A1</sub>	L <sub>A10</sub>	L <sub>A90</sub>	L <sub>Aeq</sub>	L <sub>Aeq</sub> (≤1.25kHz)	
RTNM1 Day	05/12/2019 14:34	56	51	48	38	44	42	<i>Site related noise events:</i> <b>SMC: Inaudible</b> <i>Other noise events:</i> Wind 38-43 Birds 42-56 Roadworks 40-42
RTNM2 Evening	05/12/2019 21:52	65	50	43	31	40	39	<i>Site related noise events:</i> <b>SMC: Audible</b> General mining operations 27-30 <b>L<sub>Aeq</sub>(15minute) contribution 28 dBA</b> <i>Other noise events:</i> Wind 37-49 Falling stick 65 Birds 43-58 Road construction 37

## 4.3 Rail Noise Monitoring

SMC rail pass-by noise levels are presented in **Table 12**.

**Table 12 Operator-attended Rail Noise Monitoring Results**

Monitoring Location	Date and Time	L <sub>Amax</sub> (dBA)	
		Horn Included	Horn Excluded
TN1	05/12/2019 12:18 PM	85	77
TN2	06/12/2019 10:10AM	84	81

Maximum SMC rail pass-were compliant with the 85 dBA L<sub>Amax</sub> limit at both locations, including the sounding of the horn on the approach to the level crossing at both locations.

## 5 Performance Assessment

### 5.1 Operations

Results of the operator-attended noise measurements compared with the relevant noise criteria contained in the SMC Development Consent are given in **Table 13**.

**Table 13 Performance Assessment – Operations**

	Estimated SMC LAeq(15minute) Noise Level dBA <sup>1</sup>			Noise Criteria LAeq(15minute) dBA			Compliance		
	Day	Eve	Night	Day	Eve	Night	Day	Eve	Night
Atkins	I/A <sup>4</sup>	25	I/A	35	35	35	Yes	Yes	Yes
Clarke <sup>2</sup>	45	44	44	37	37	37	N/A <sup>5</sup>	N/A <sup>5</sup>	N/A <sup>5</sup>
Bagnall <sup>3</sup>	32	34	31	37	37	37	Yes	Yes	Yes
Hall	I/A	I/A	I/A	35	35	35	Yes	Yes	Yes
Lowrey	I/A	I/A	I/A	35	35	35	Yes	Yes	Yes
Pryce Jones	I/A	I/A	32	43	43	43	Yes	Yes	Yes
Van der Drift	I/A	30	23	37	36	35	Yes	Yes	Yes
Greenwood	I/A	I/A	I/A	35	35	35	Yes	Yes	Yes

Note 1: I/A = Inaudible.

Note 2: Owned by Stratford Coal Pty Ltd. Criteria adopted from Bagnall.

Note 3: Modelled result.

Note 4: Not assessed due to non-compliant weather conditions during the Clarke operator attended measurement.

Note 5: Criteria adopted as a guide only.

Results presented in **Table 13** indicate that SMC operations during the operator-attended noise monitoring at all privately owned locations under applicable weather conditions were compliant with the relevant Development Consent conditions.

## 5.2 Sleep Disturbance

Results of the night period sleep disturbance measurements compared with the relevant noise criteria contained in the Development Consent are given in **Table 14**.

**Table 14 Performance Assessment – Sleep Disturbance**

Location	SMC LA1(1minute) Contribution	Noise Criteria LA1(1minute)	Compliance
Atkins	I/A <sup>1</sup>	45	Yes
Clarke <sup>2</sup>	53	45	N/A <sup>3</sup>
Bagnall	40	45	N/A
Hall	I/A	45	Yes
Lowrey	I/A	45	Yes
Pryce Jones	34	49	Yes
Van der Drift	25	45	Yes
Greenwood	I/A	45	Yes

Note 1: I/A = Inaudible.

Note 2: Owned by Stratford Coal Pty Ltd. Criteria adopted from Bagnall.

Note 3: Criteria adopted as a guide only.

**Table 14** indicate that SMC operations during the night-time operator-attended noise monitoring at all privately owned locations under applicable weather conditions were compliant with the relevant Development Consent conditions.

## 6 Conclusion

SLR was engaged by Stratford Coal Pty Limited to conduct monthly noise monitoring for the Stratford Mining Complex (SMC) operations guided by the requirements of the *Stratford Mining Complex Noise Management Plan (NMP)*, Document No. NMP-R03-A, dated 17 June 2019.

Operator-attended noise monitoring was conducted at seven residential receiver locations commencing Thursday 5 December 2019 and Friday 6 December 2019 in order to determine the noise performance of the SMC operations against the Development Consent conditions.

Based on the measured SMC noise contribution, compliance with the relevant operational noise criteria was achieved at all noise monitoring locations during the day, evening and night monitoring periods

Based on the measured SMC noise contribution, compliance with the relevant sleep disturbance noise criteria was achieved at all privately owned noise monitoring locations during the night-time noise monitoring period under applicable weather conditions.

# APPENDIX A

## Acoustic Terminology

### 1. Sound Level or Noise Level

The terms ‘sound’ and ‘noise’ are almost interchangeable, except that ‘noise’ often refers to unwanted sound.

Sound (or noise) consists of minute fluctuations in atmospheric pressure. The human ear responds to changes in sound pressure over a very wide range with the loudest sound pressure to which the human ear can respond being ten million times greater than the softest. The decibel (abbreviated as dB) scale reduces this ratio to a more manageable size by the use of logarithms.

The symbols SPL, L or LP are commonly used to represent Sound Pressure Level. The symbol LA represents A-weighted Sound Pressure Level. The standard reference unit for Sound Pressure Levels expressed in decibels is  $2 \times 10^{-5}$  Pa.

### 2. ‘A’ Weighted Sound Pressure Level

The overall level of a sound is usually expressed in terms of dBA, which is measured using a sound level meter with an ‘A-weighting’ filter. This is an electronic filter having a frequency response corresponding approximately to that of human hearing.

People’s hearing is most sensitive to sounds at mid frequencies (500 Hz to 4,000 Hz), and less sensitive at lower and higher frequencies. Different sources having the same dBA level generally sound about equally loud.

A change of 1 dB or 2 dB in the level of a sound is difficult for most people to detect, whilst a 3 dB to 5 dB change corresponds to a small but noticeable change in loudness. A 10 dB change corresponds to an approximate doubling or halving in loudness. The table below lists examples of typical noise levels.

Sound Pressure Level (dBA)	Typical Source	Subjective Evaluation
130	Threshold of pain	Intolerable
120	Heavy rock concert	Extremely noisy
110	Grinding on steel	
100	Loud car horn at 3 m	Very noisy
90	Construction site with pneumatic hammering	Loud
80	Kerbside of busy street	
70	Loud radio or television	
60	Department store	Moderate to quiet
50	General Office	
40	Inside private office	Quiet to very quiet
30	Inside bedroom	
20	Recording studio	Almost silent

Other weightings (eg B, C and D) are less commonly used than A-weighting. Sound Levels measured without any weighting are referred to as ‘linear’, and the units are expressed as dB(lin) or dB.

### 3. Sound Power Level


The Sound Power of a source is the rate at which it emits acoustic energy. As with Sound Pressure Levels, Sound Power Levels are expressed in decibel units (dB or dBA), but may be identified by the symbols SWL or LW, or by the reference unit  $10^{-12}$  W.

The relationship between Sound Power and Sound Pressure is similar to the effect of an electric radiator, which is characterised by a power rating but has an effect on the surrounding environment that can be measured in terms of a different parameter, temperature.

### 4. Statistical Noise Levels

Sounds that vary in level over time, such as road traffic noise and most community noise, are commonly described in terms of the statistical exceedance levels LAN, where LAN is the A-weighted sound pressure level exceeded for N% of a given measurement period. For example, the LA1 is the noise level exceeded for 1% of the time, LA10 the noise exceeded for 10% of the time, and so on.

The following figure presents a hypothetical 15 minute noise survey, illustrating various common statistical indices of interest.

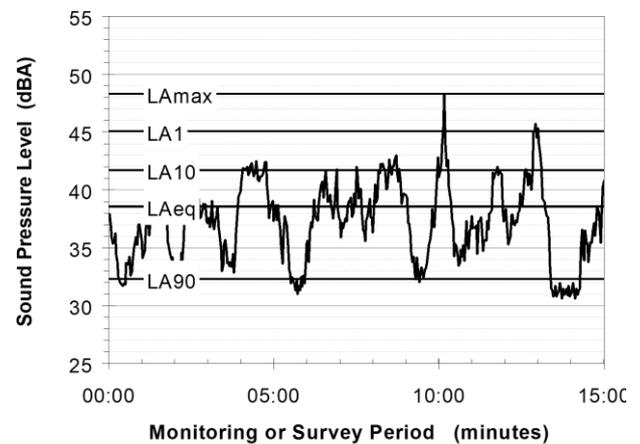

Of particular relevance, are:

LA1 The noise level exceeded for 1% of the 15 minute interval.

LA10 The noise level exceeded for 10% of the 15 minute interval. This is commonly referred to as the average maximum noise level.

LA90 The noise level exceeded for 90% of the sample period. This noise level is described as the average minimum background sound level (in the absence of the source under consideration), or simply the background level.

LAeq The A-weighted equivalent noise level (basically, the average noise level). It is defined as the steady sound level that contains the same amount of acoustical energy as the corresponding time-varying sound.

### 5. Frequency Analysis


Frequency analysis is the process used to examine the tones (or frequency components) which make up the overall noise or vibration signal.

The units for frequency are Hertz (Hz), which represent the number of cycles per second.

Frequency analysis can be in:

- Octave bands (where the centre frequency and width of each band is double the previous band)
- 1/3 octave bands (three bands in each octave band)
- Narrow band (where the spectrum is divided into 400 or more bands of equal width)

The following figure shows a 1/3 octave band frequency analysis where the noise is dominated by the 200 Hz band. Note that the indicated level of each individual band is less than the overall level, which is the logarithmic sum of the bands.

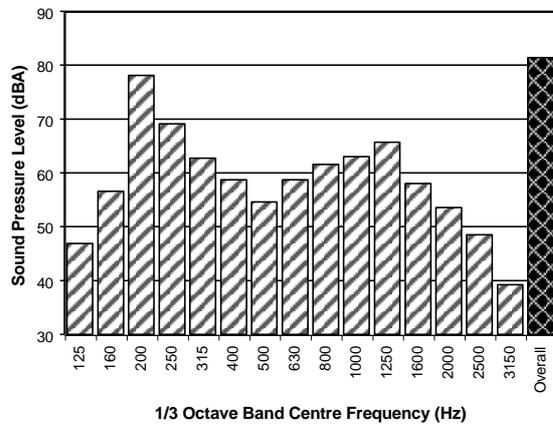

## 6. Annoying Noise (Special Audible Characteristics)


A louder noise will generally be more annoying to nearby receivers than a quieter one. However, noise is often also found to be more annoying and result in larger impacts where the following characteristics are apparent:

- **Tonality** - tonal noise contains one or more prominent tones (ie differences in distinct frequency components between adjoining octave or 1/3 octave bands), and is normally regarded as more annoying than 'broad band' noise.
- **Impulsiveness** - an impulsive noise is characterised by one or more short sharp peaks in the time domain, such as occurs during hammering.
- **Intermittency** - intermittent noise varies in level with the change in level being clearly audible. An example would include mechanical plant cycling on and off.
- **Low Frequency Noise** - low frequency noise contains significant energy in the lower frequency bands, which are typically taken to be in the 10 to 160 Hz region.


# APPENDIX B

## Operator Attended Noise Survey Charts


**Figure B1 – Day Period – ‘Atkins’ Operator Attended Noise Survey Results**

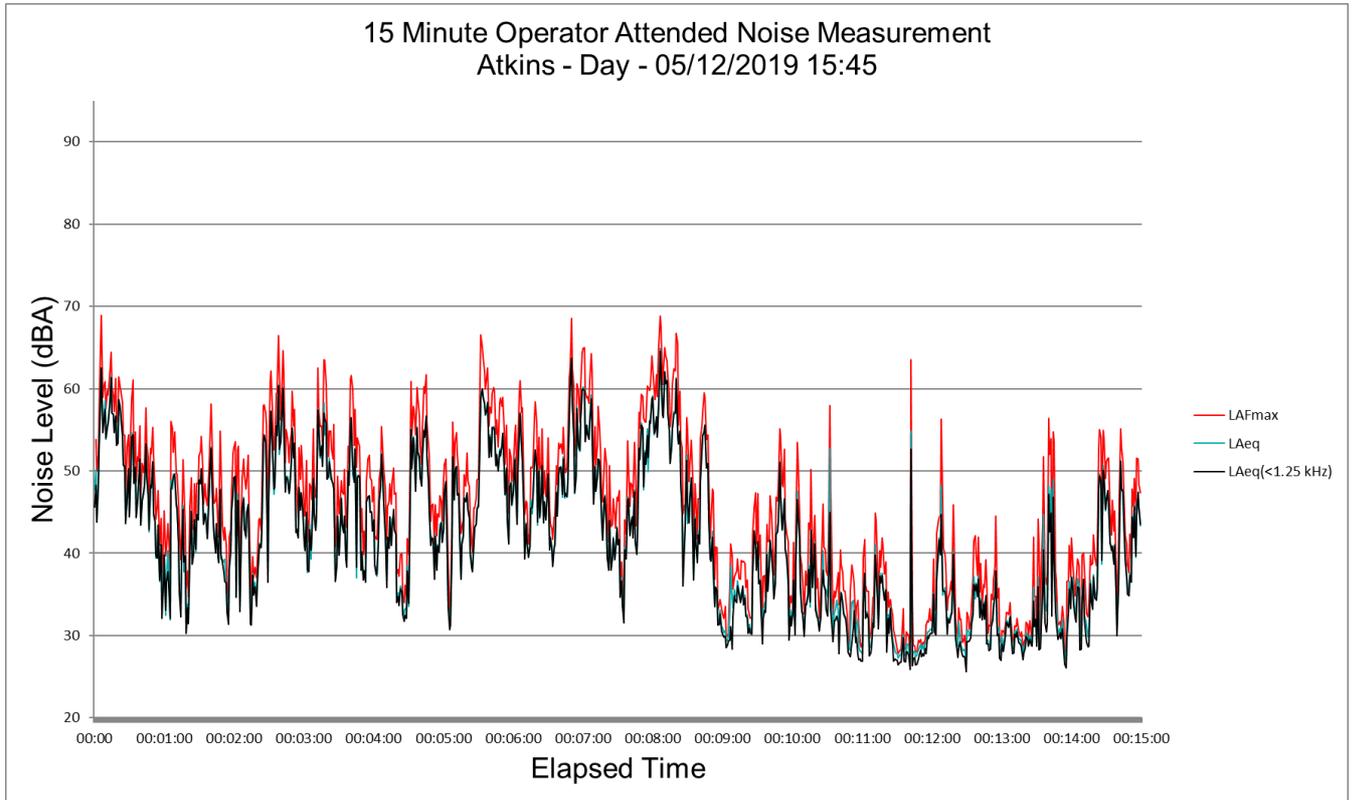


**Figure B2 – Evening Period – ‘Atkins’ Operator Attended Noise Survey Results**

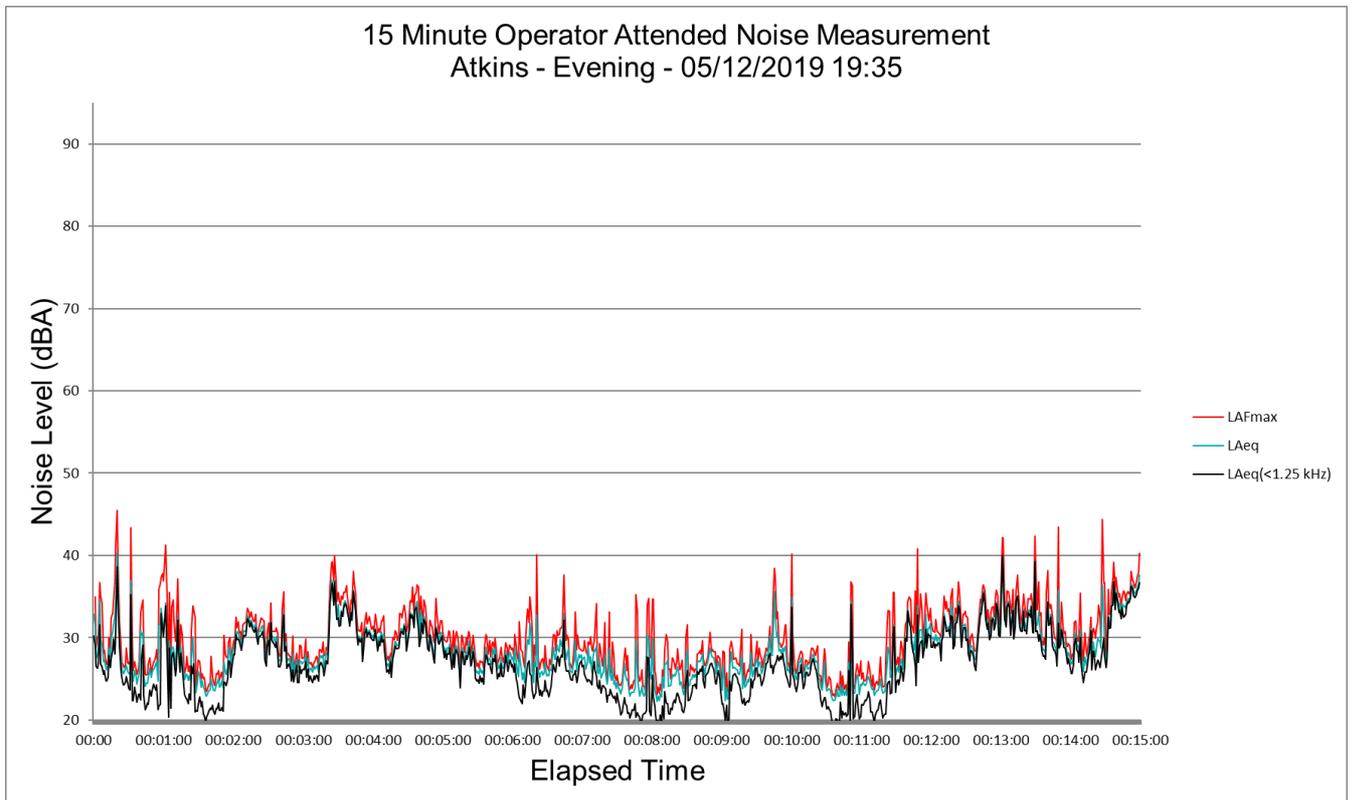


**Figure B3 – Night Period – ‘Atkins’ Operator Attended Noise Survey Results**

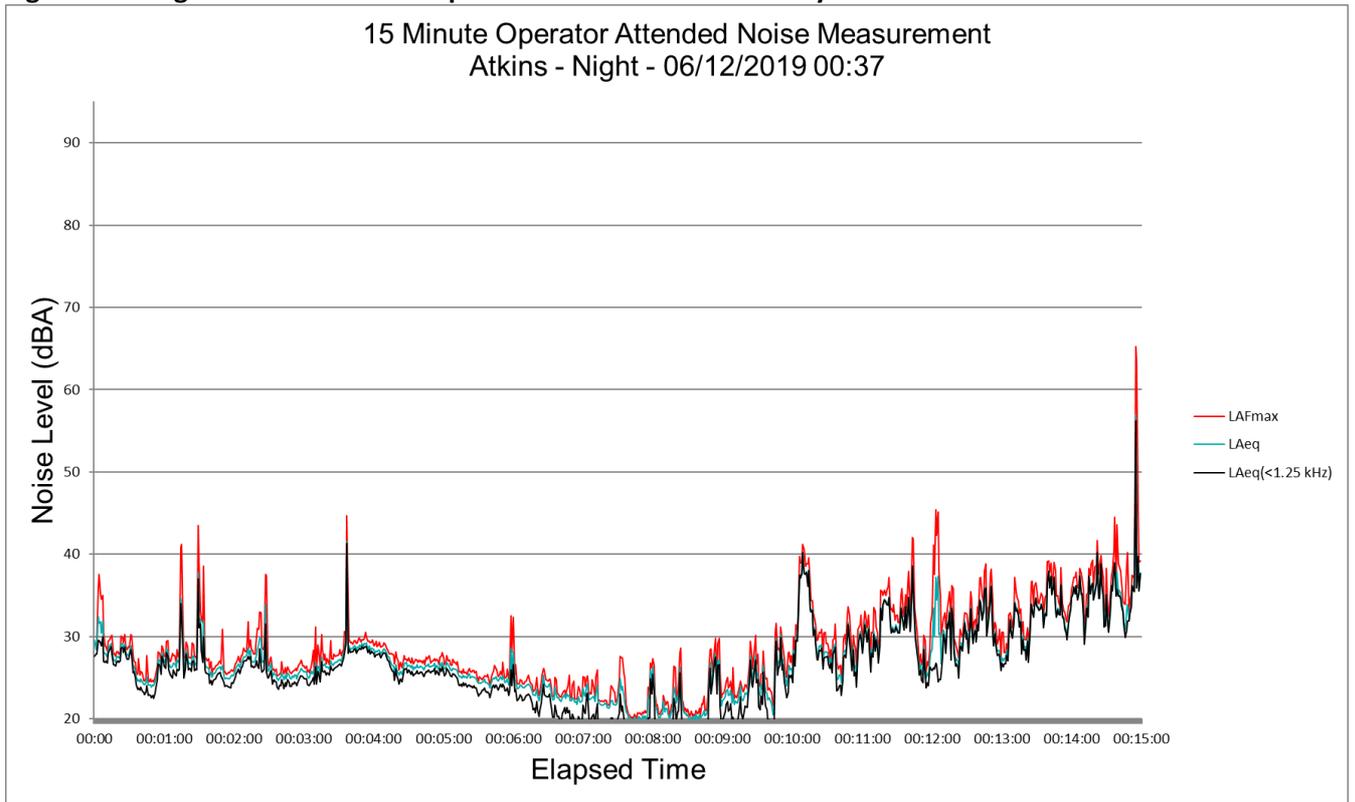


**Figure B4 – Day Period – ‘Clarke’ Operator Attended Noise Survey Results**

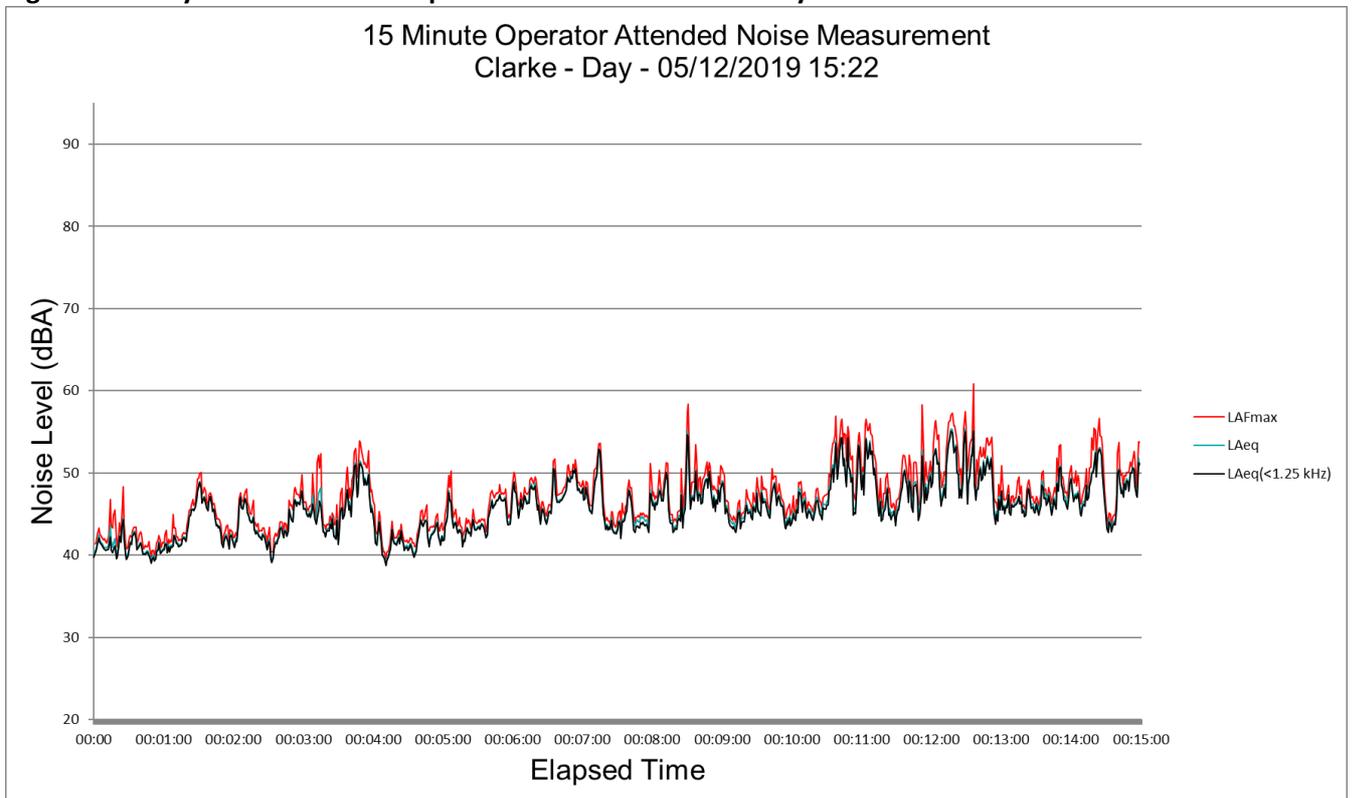


**Figure B5 – Evening Period – ‘Clarke’ Operator Attended Noise Survey Results**

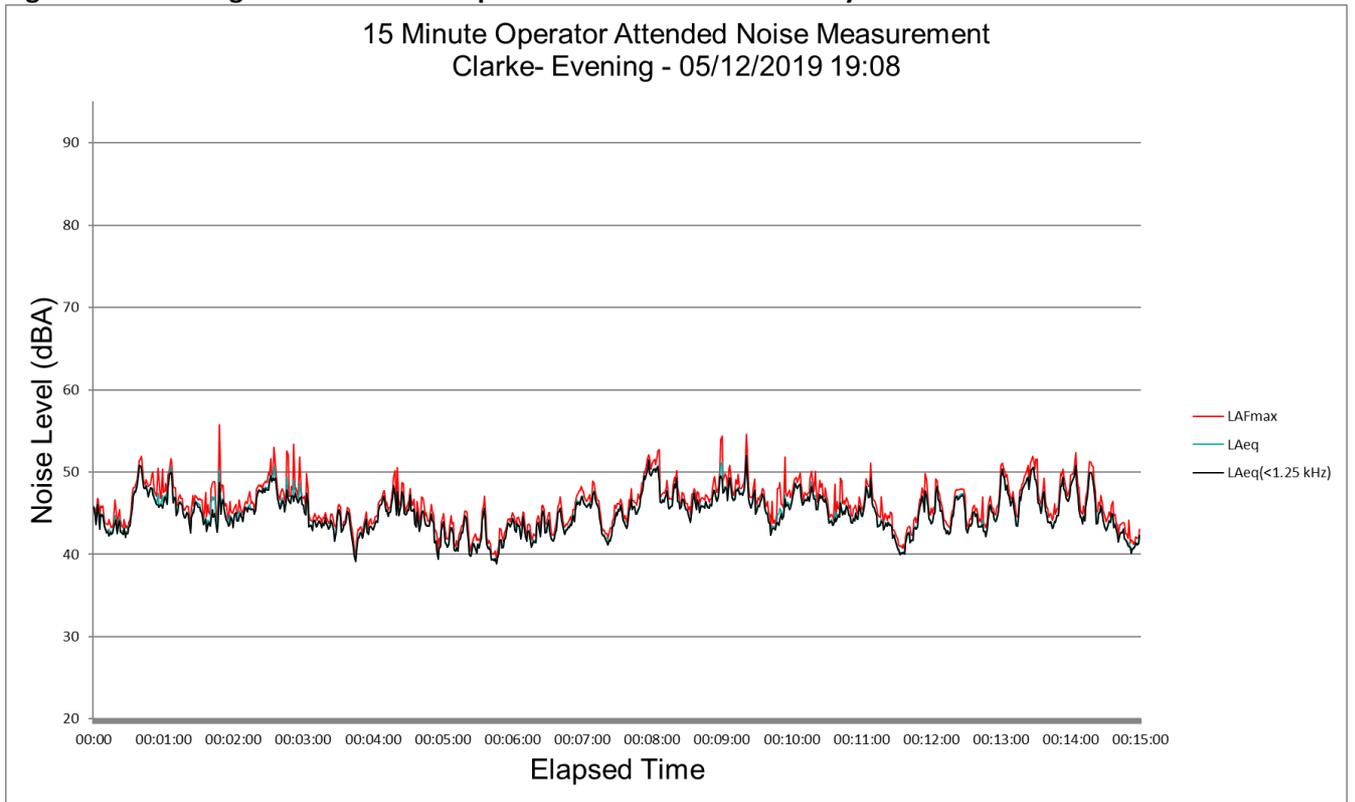


**Figure B6 – Night Period – ‘Clarke’ Operator Attended Noise Survey Results**

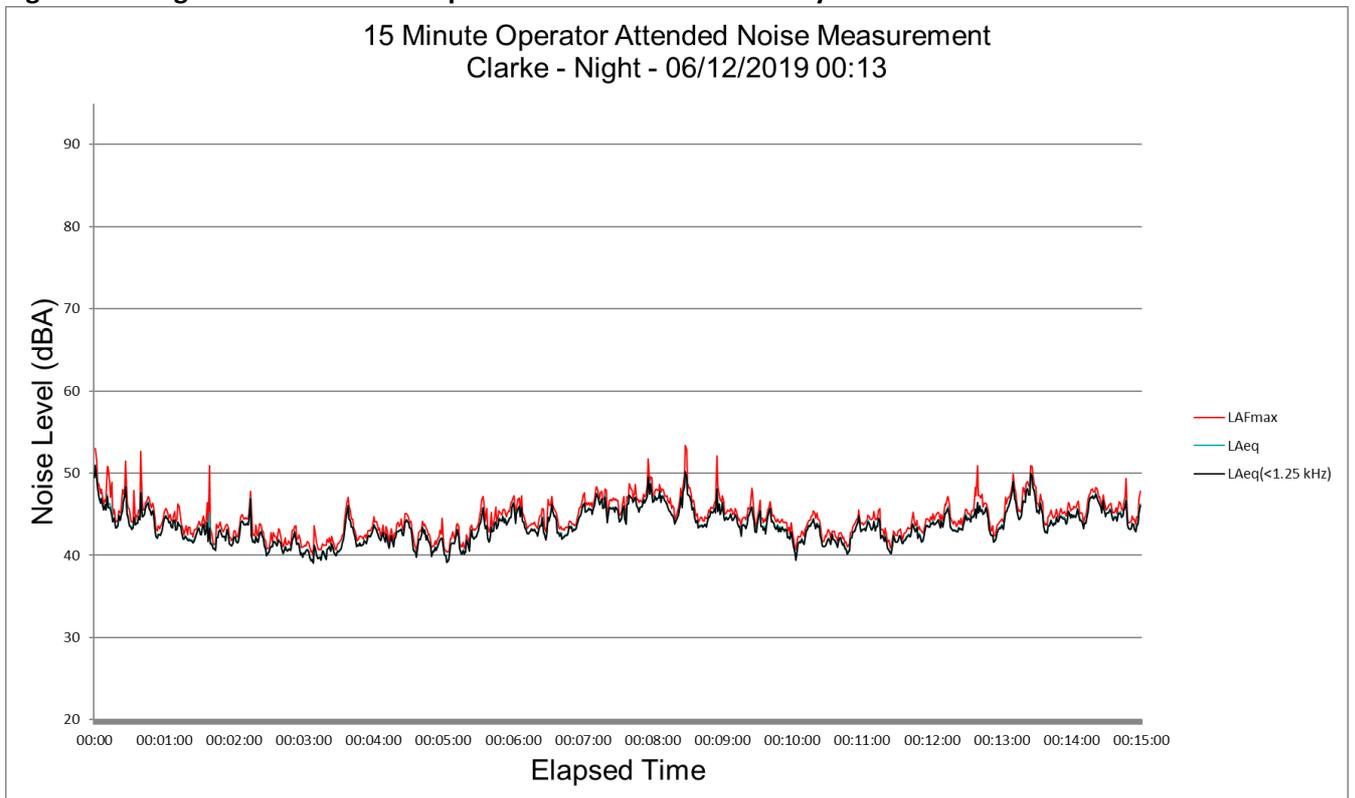


**Figure B7 – Day Period – ‘Hall’ Operator Attended Noise Survey Results**

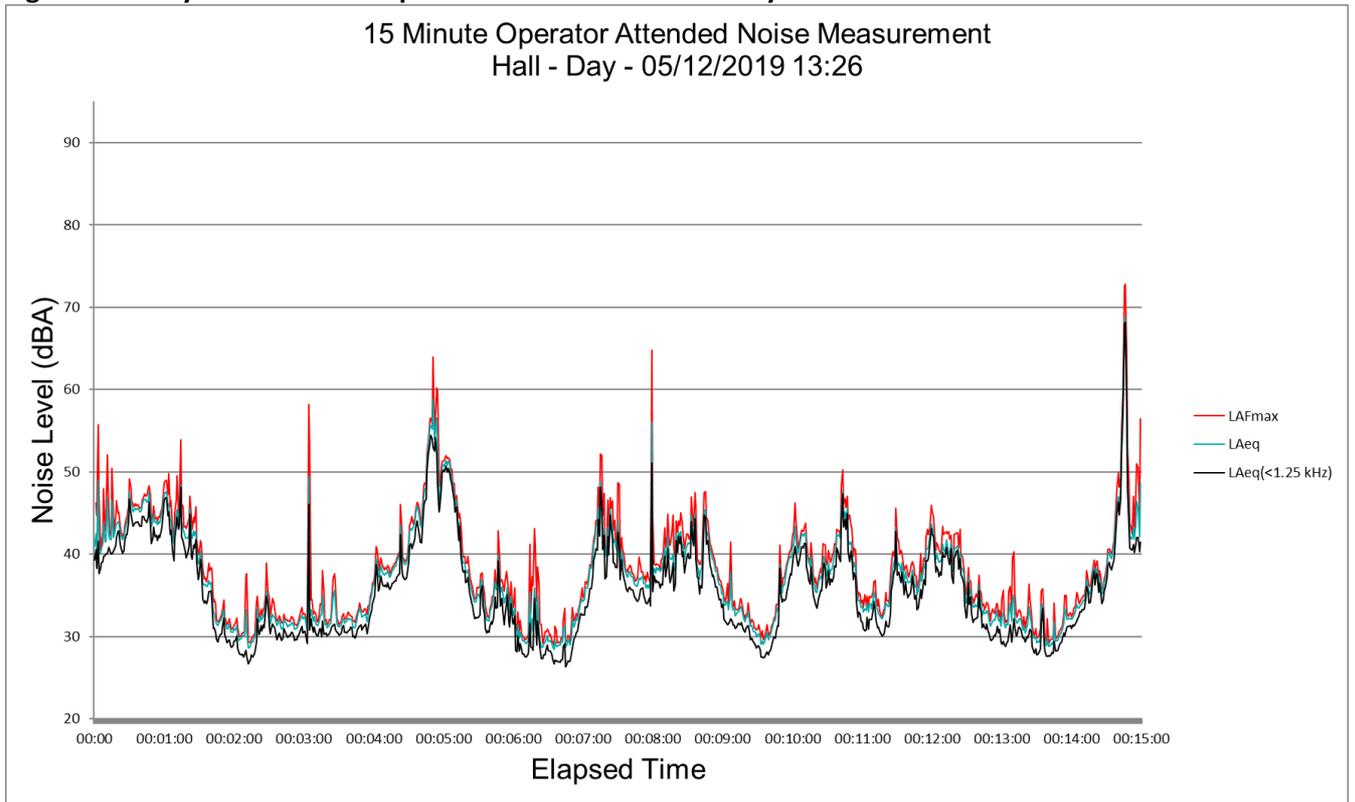


**Figure B8 – Evening Period – ‘Hall’ Operator Attended Noise Survey Results**

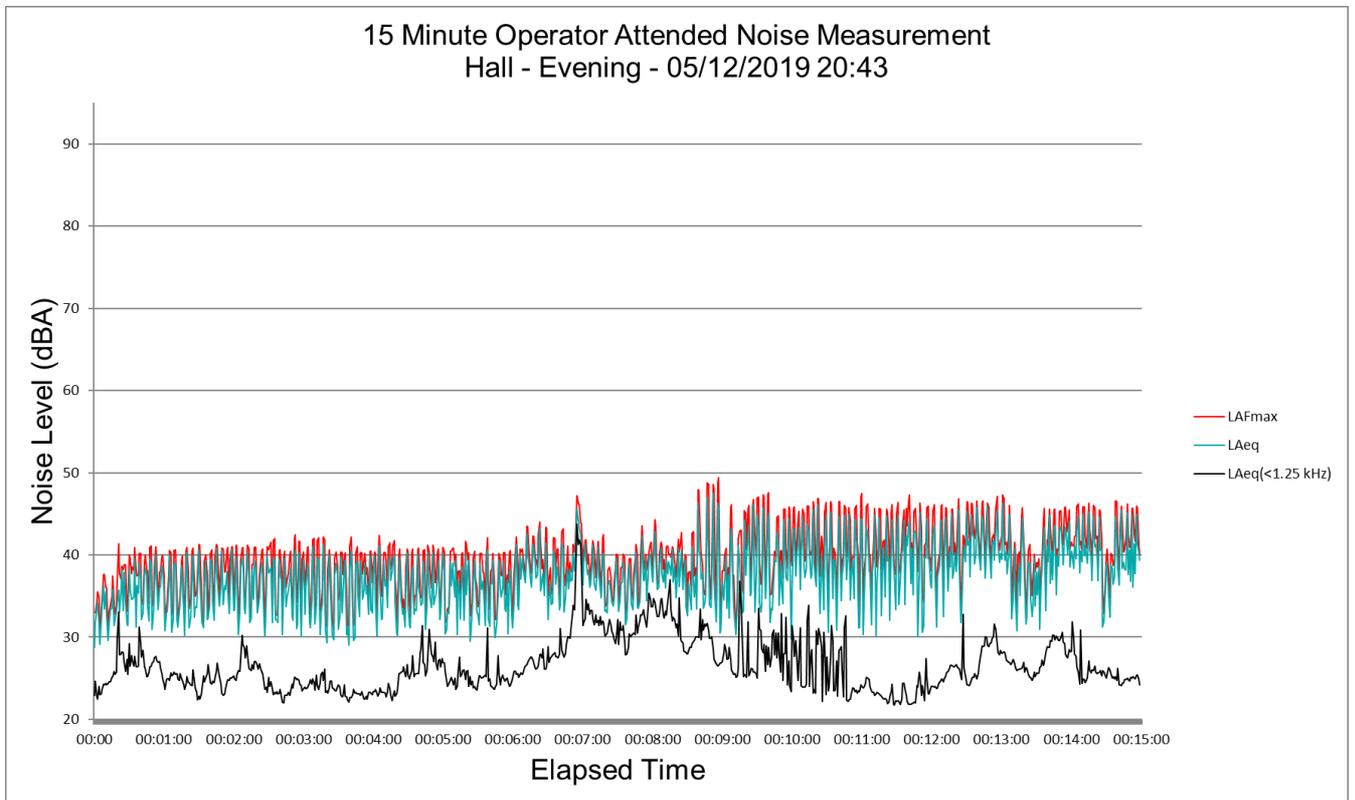


**Figure B9 – Night Period – ‘Hall’ Operator Attended Noise Survey Results**

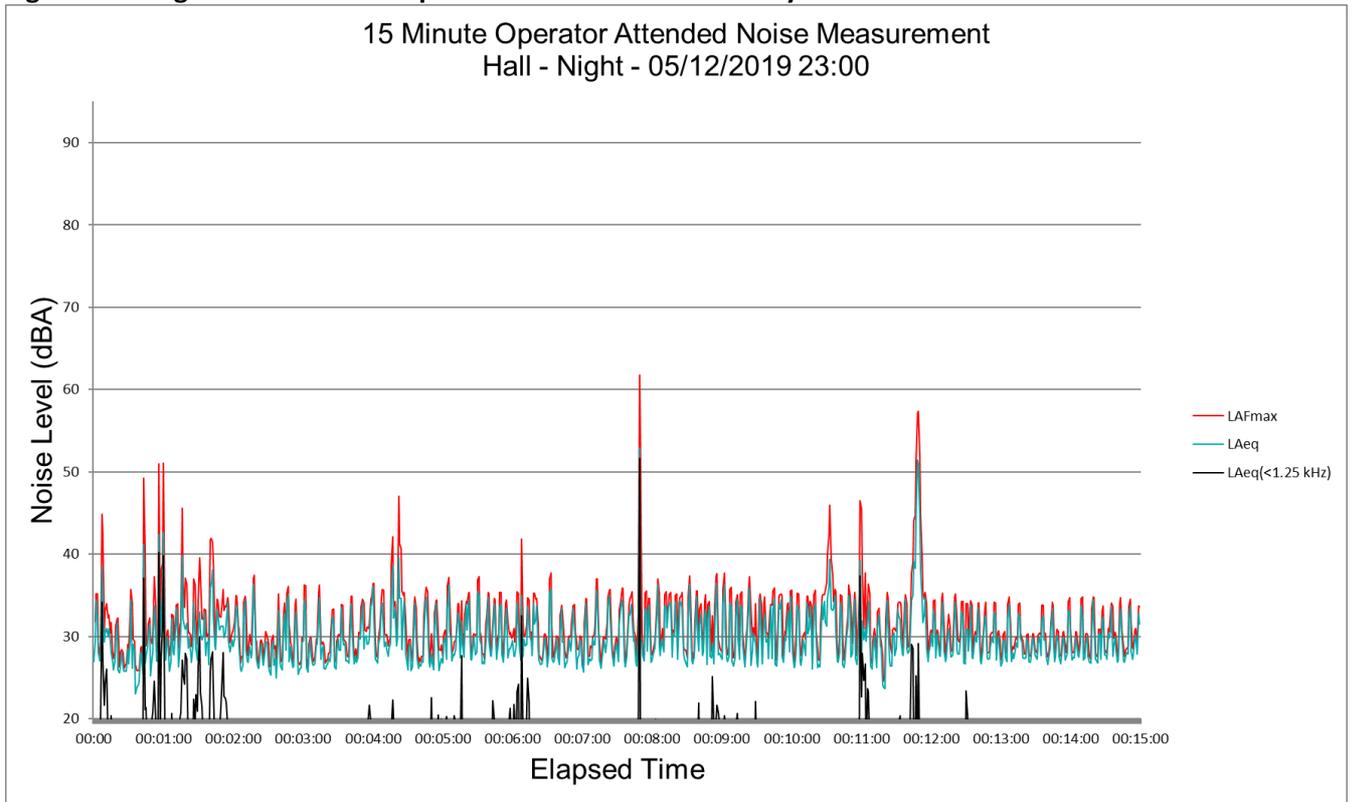


**Figure B10 – Day Period – ‘Lowrey’ Operator Attended Noise Survey Results**

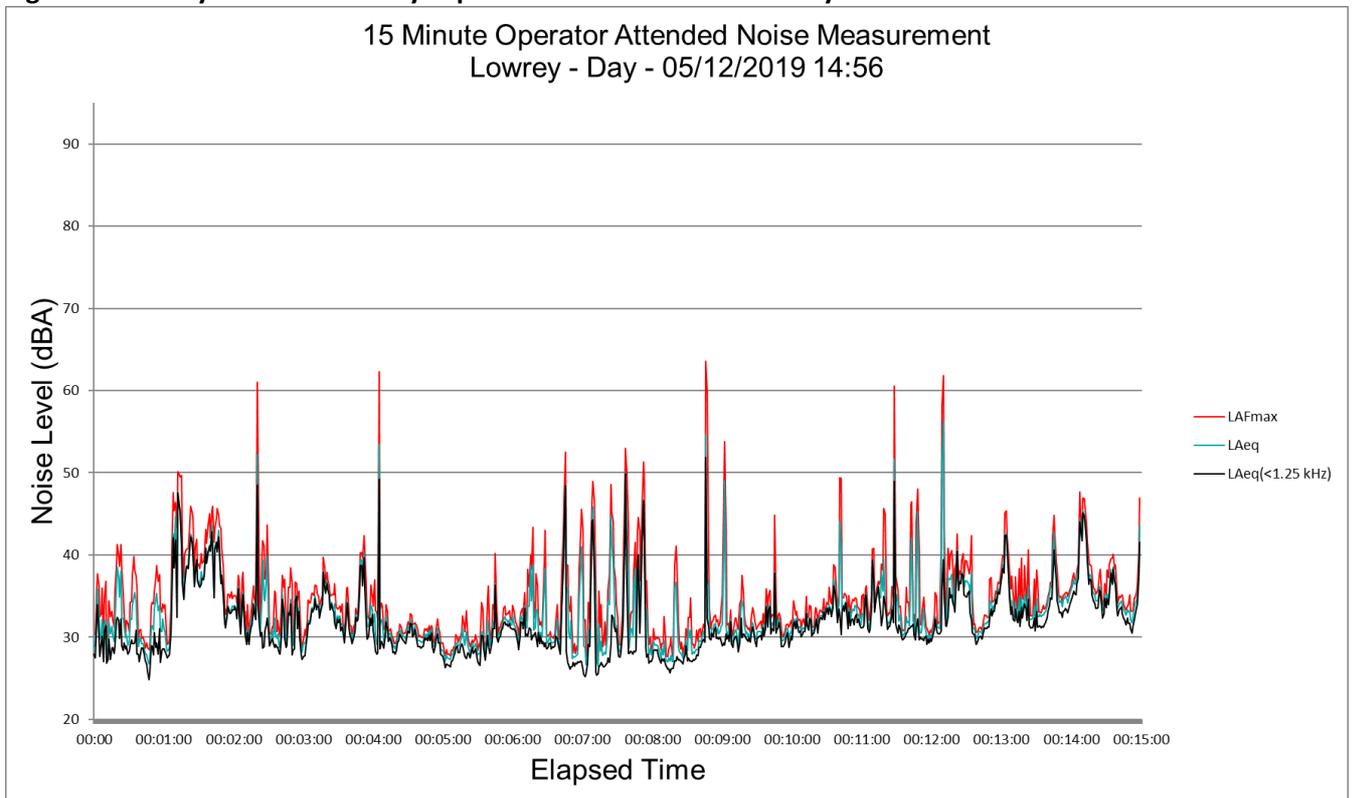


**Figure B11 – Evening Period – ‘Lowrey’ Operator Attended Noise Survey Results**

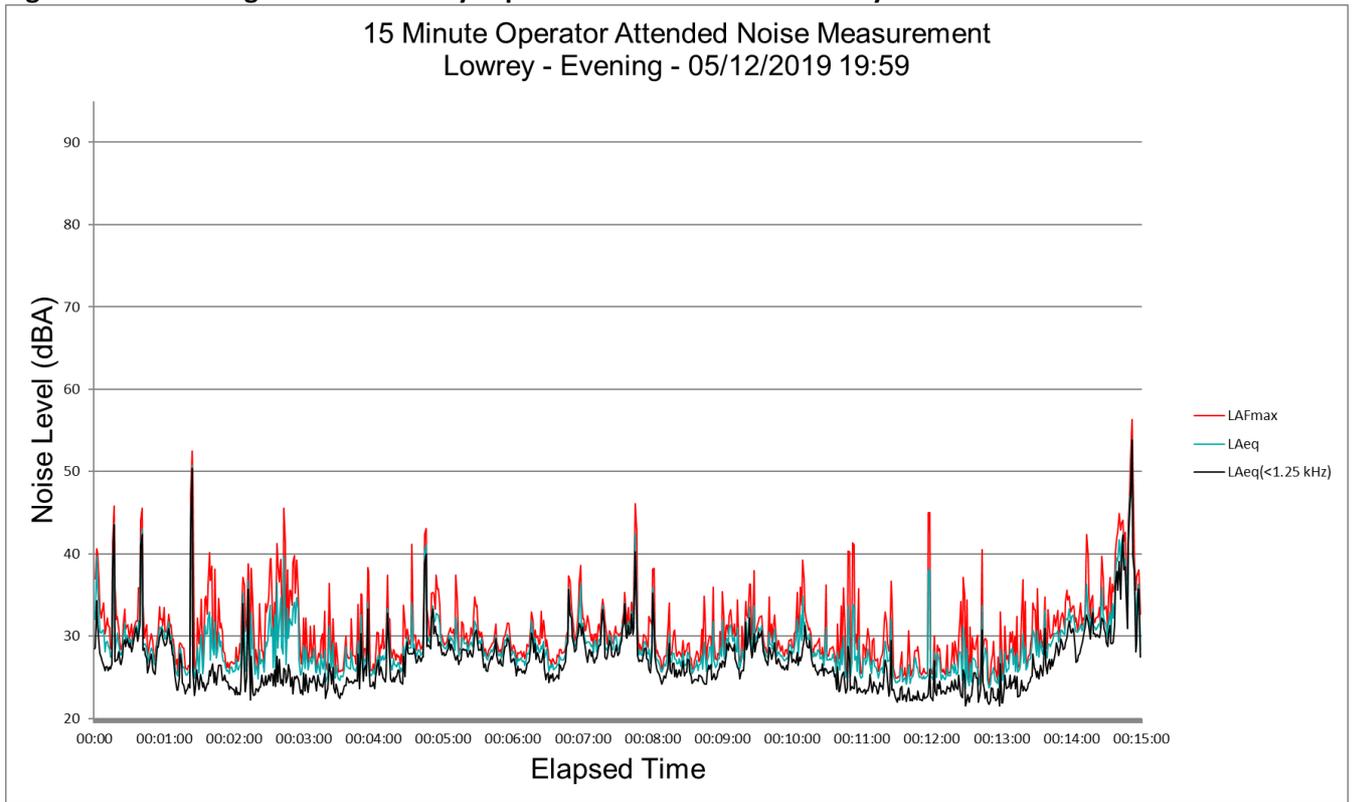


**Figure B12 – Night Period – ‘Lowrey’ Operator Attended Noise Survey Results**

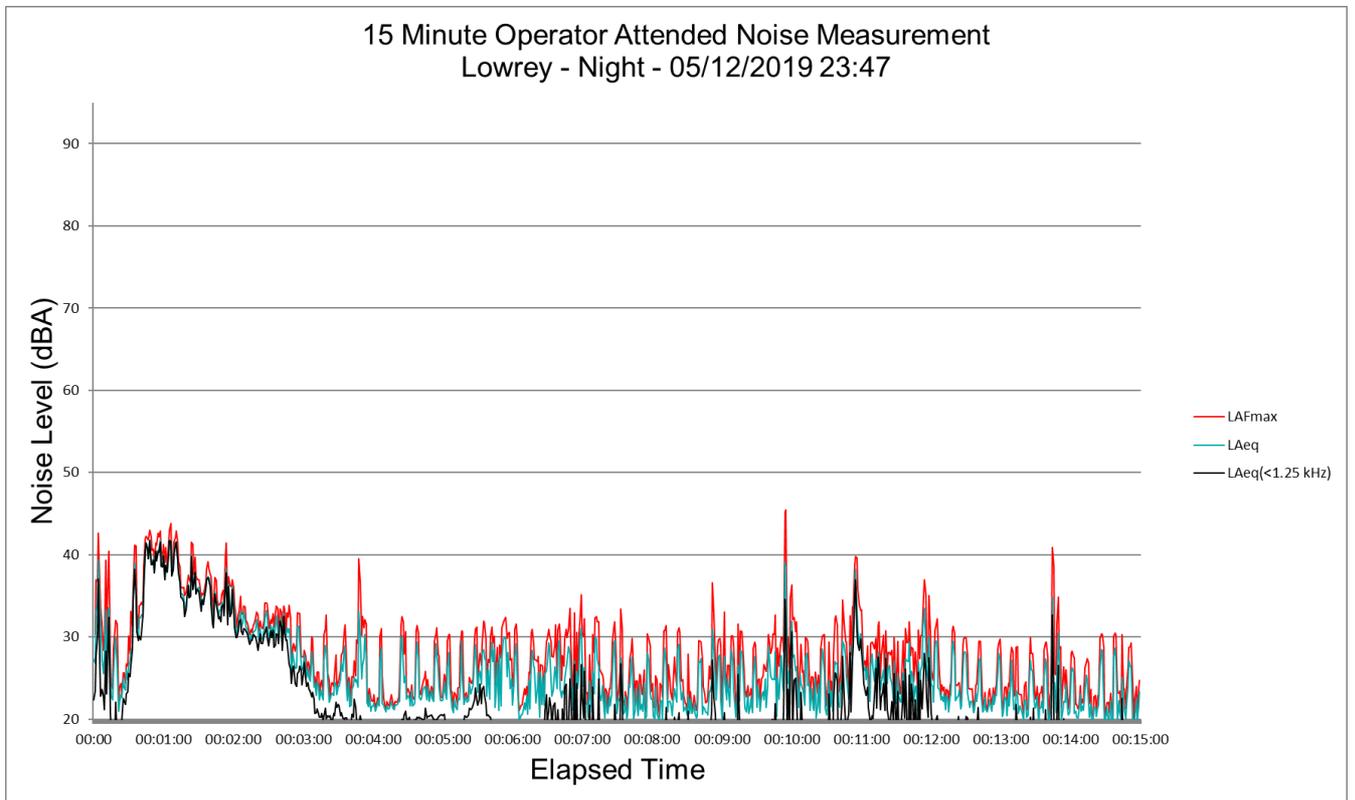


**Figure B13 – Day Period – ‘Pryce Jones’ Operator Attended Noise Survey Results**

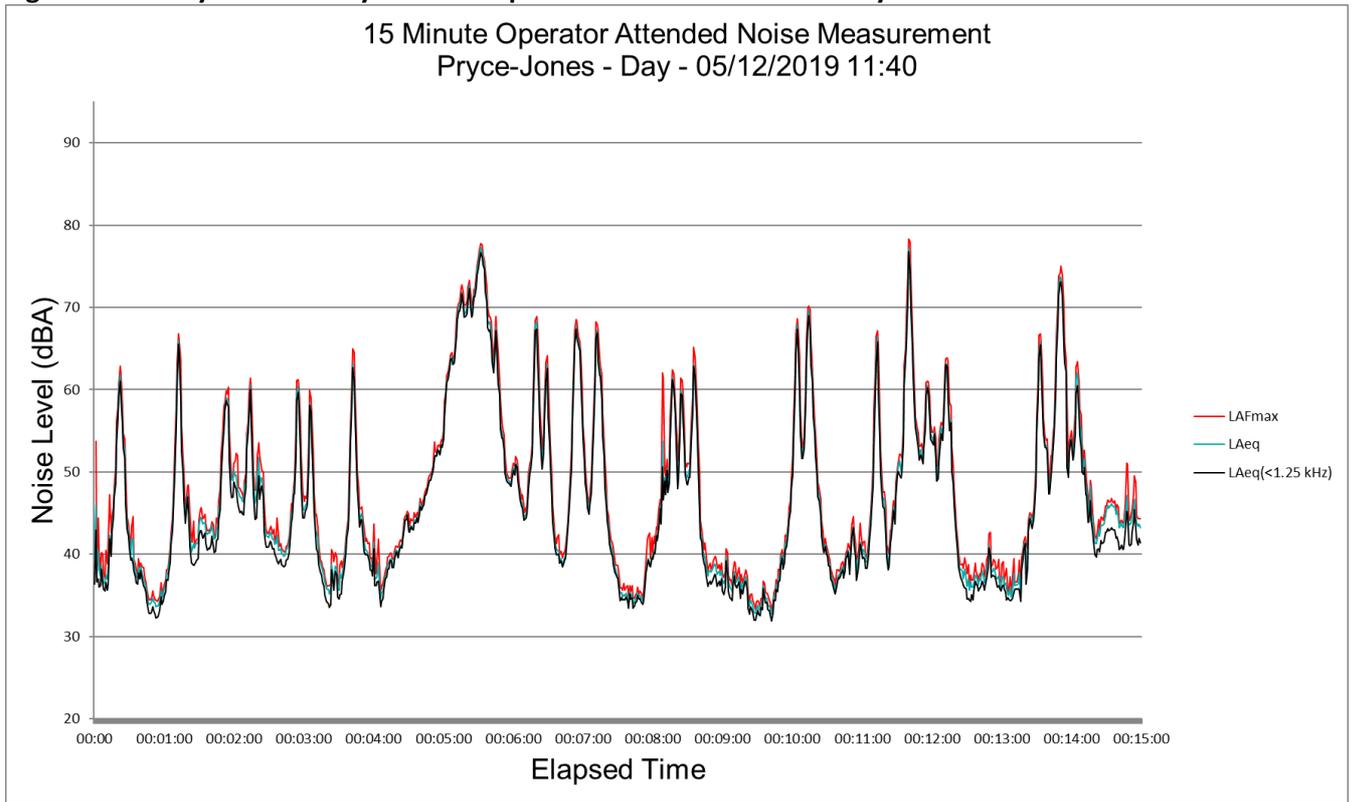


**Figure B14 – Evening Period – ‘Pryce Jones’ Operator Attended Noise Survey Results**

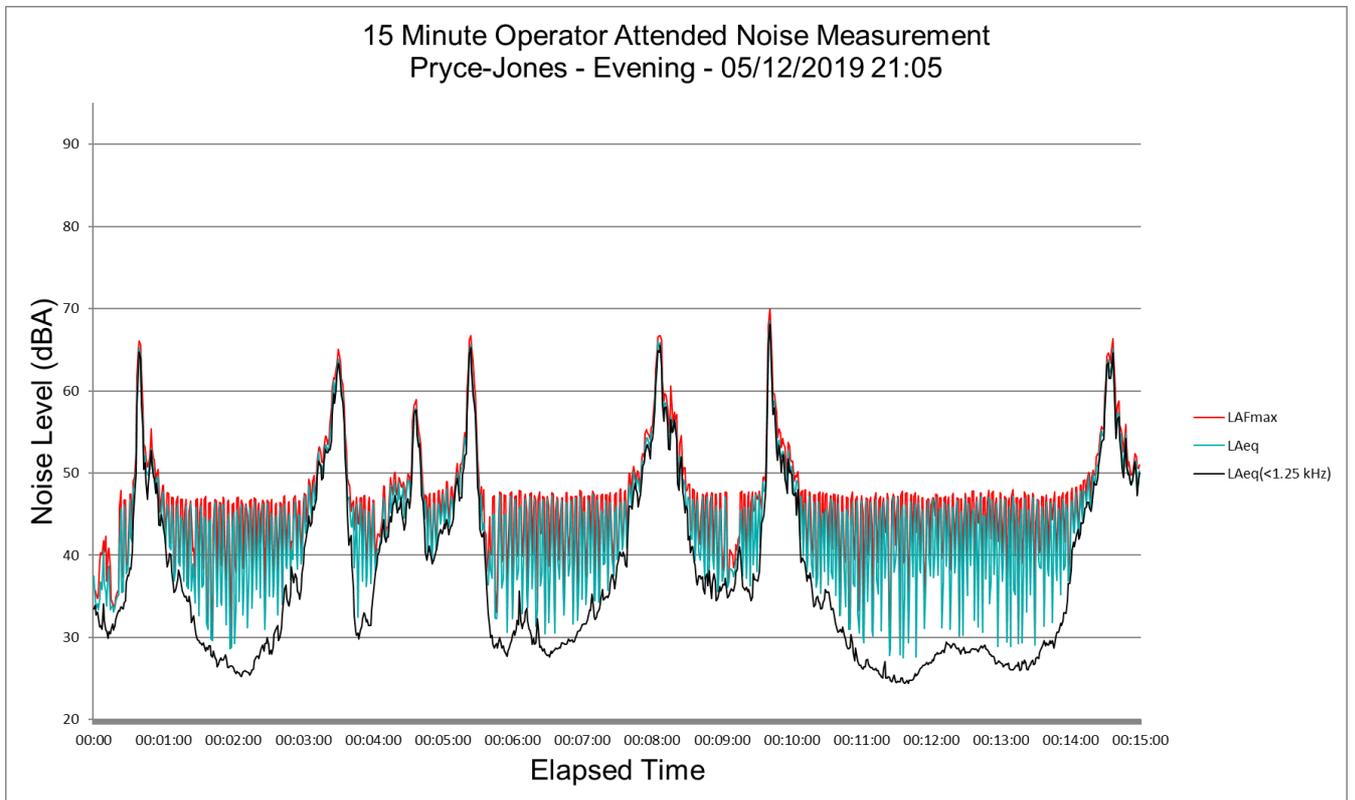


**Figure B15 – Night Period – ‘Pryce Jones’ Operator Attended Noise Survey Results**

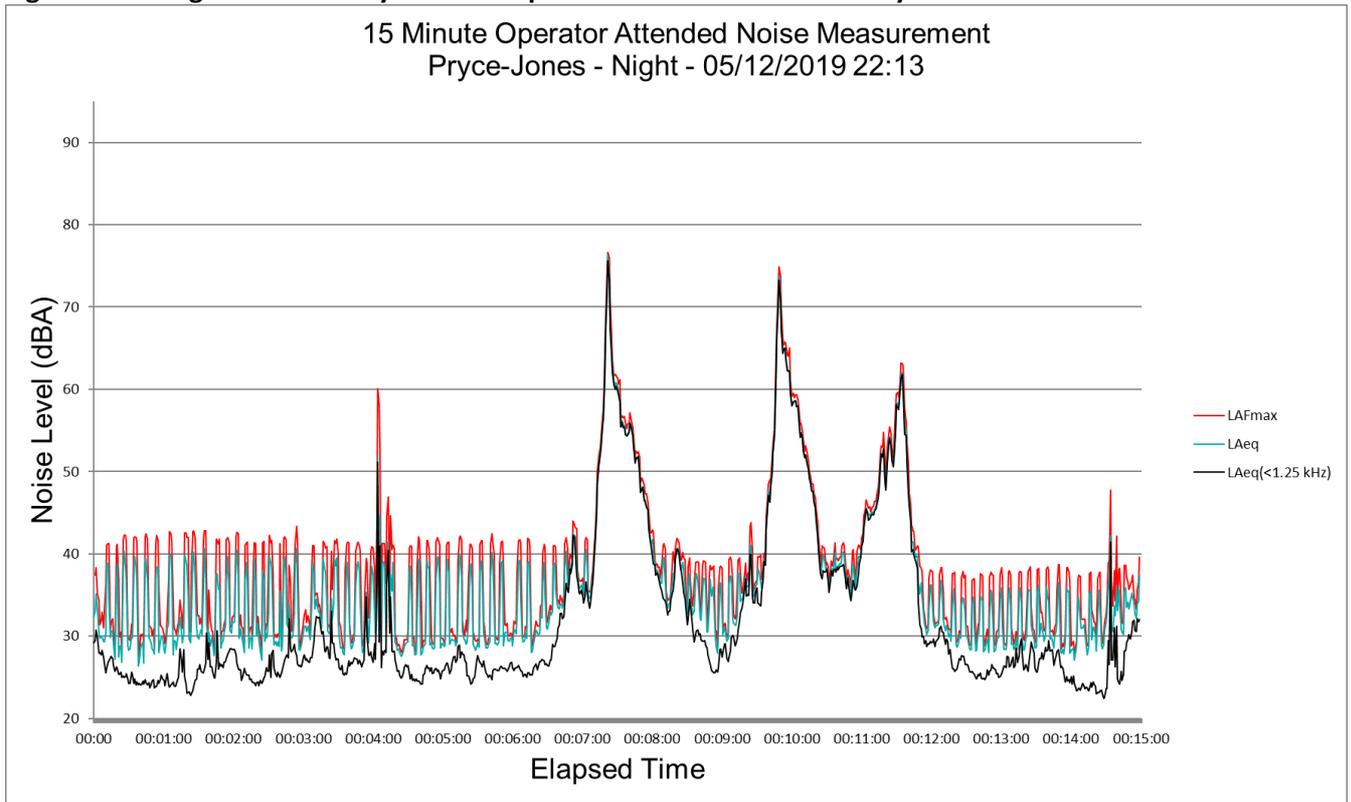


**Figure B16 – Day Period – ‘Van der Drift’ Operator Attended Noise Survey Results**

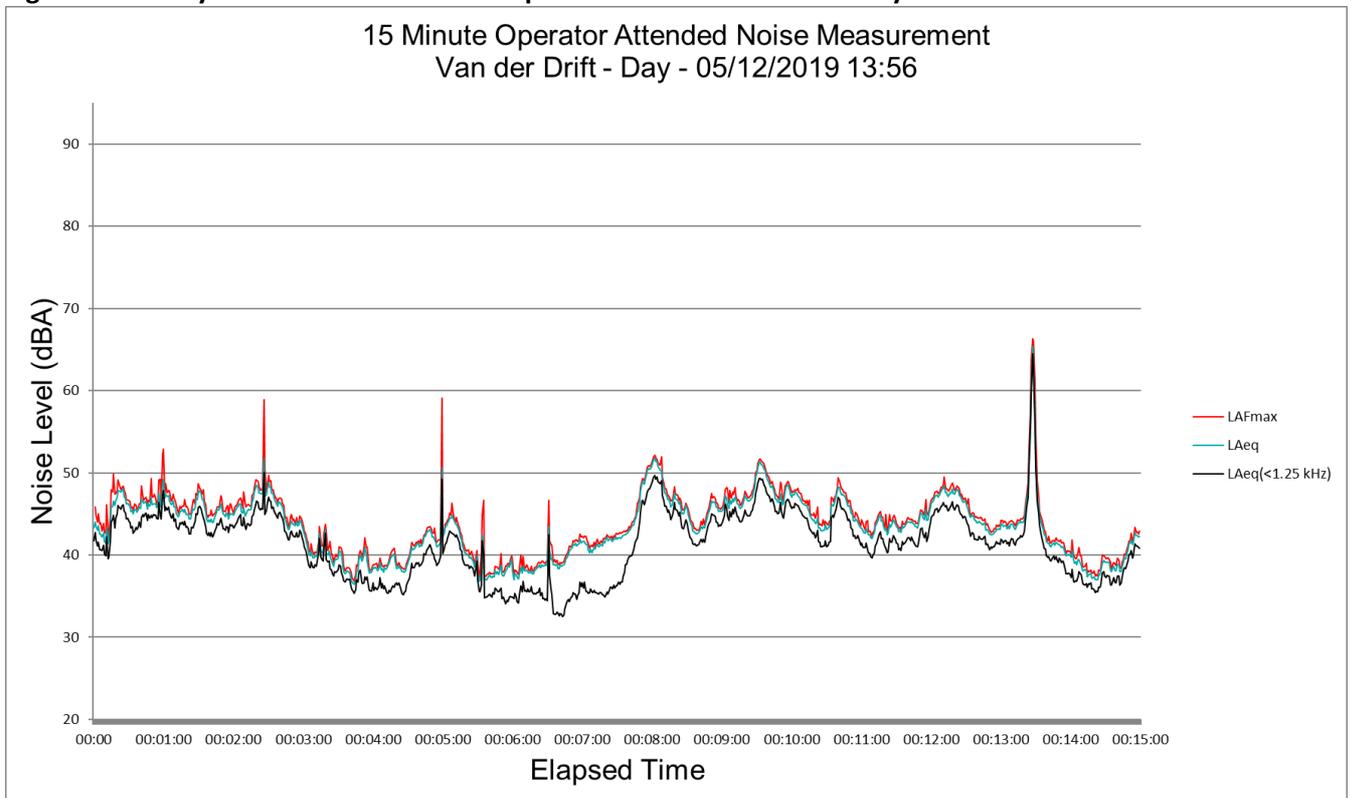


**Figure B17 – Evening Period – ‘Van der Drift’ Operator Attended Noise Survey Results**

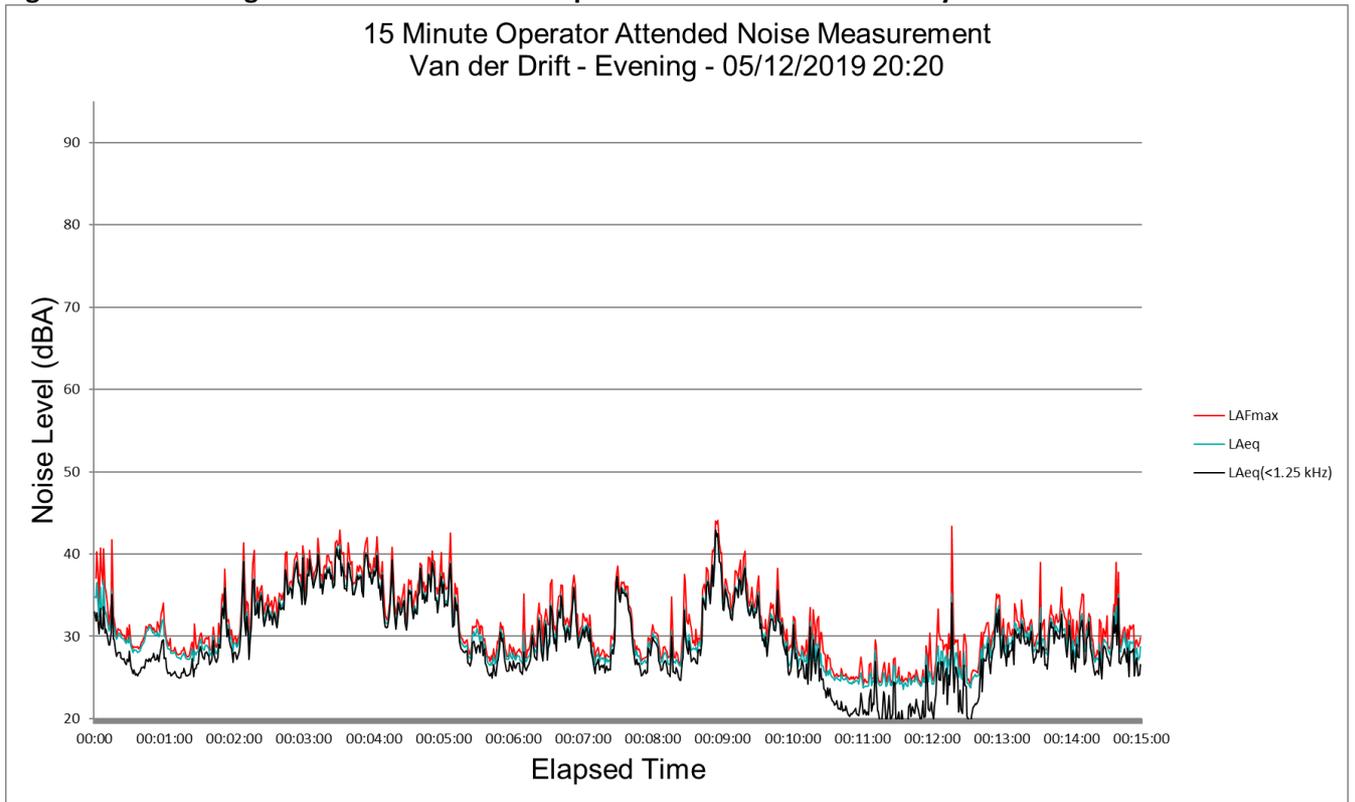


**Figure B18 – Night Period – ‘Van der Drift’ Operator Attended Noise Survey Results**

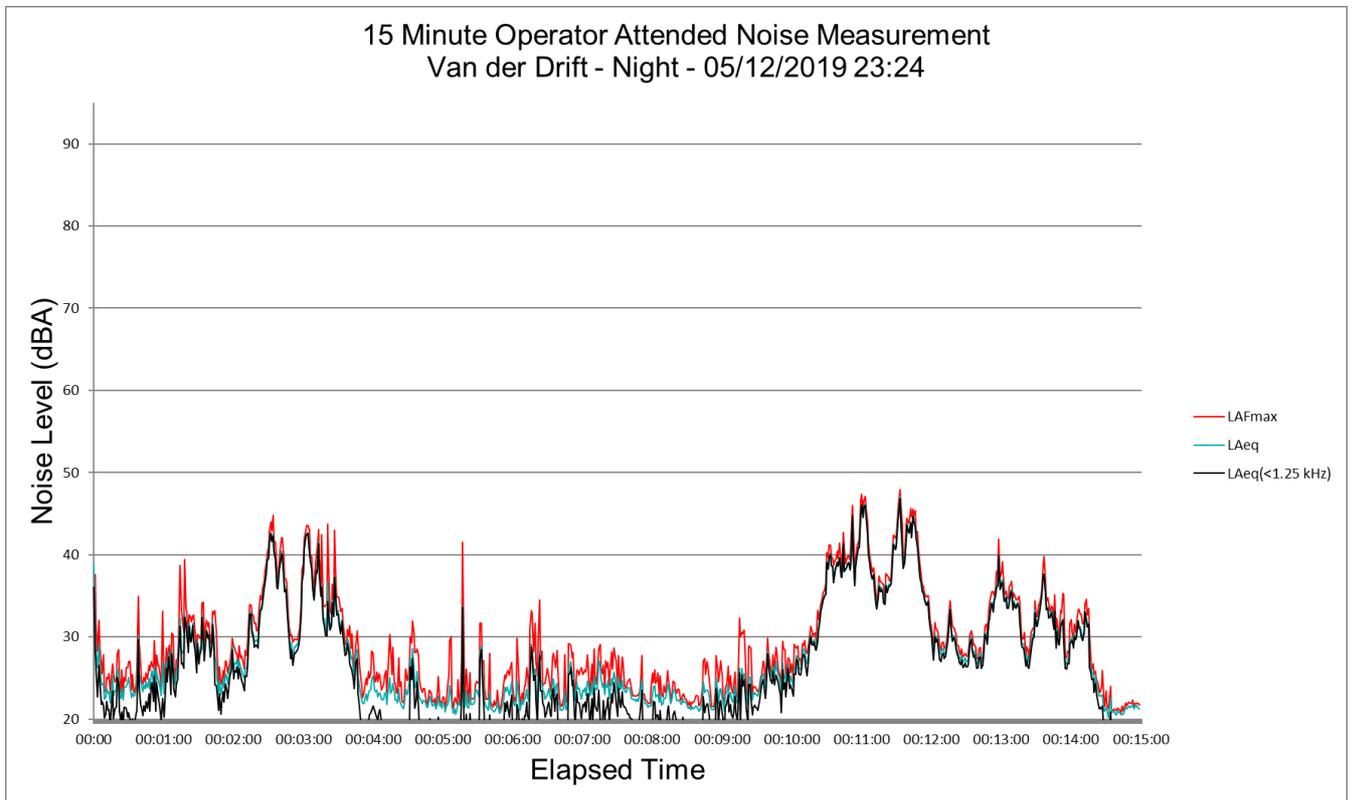


**Figure B19 – Day Period – ‘Greenwood’ Operator Attended Noise Survey Results**

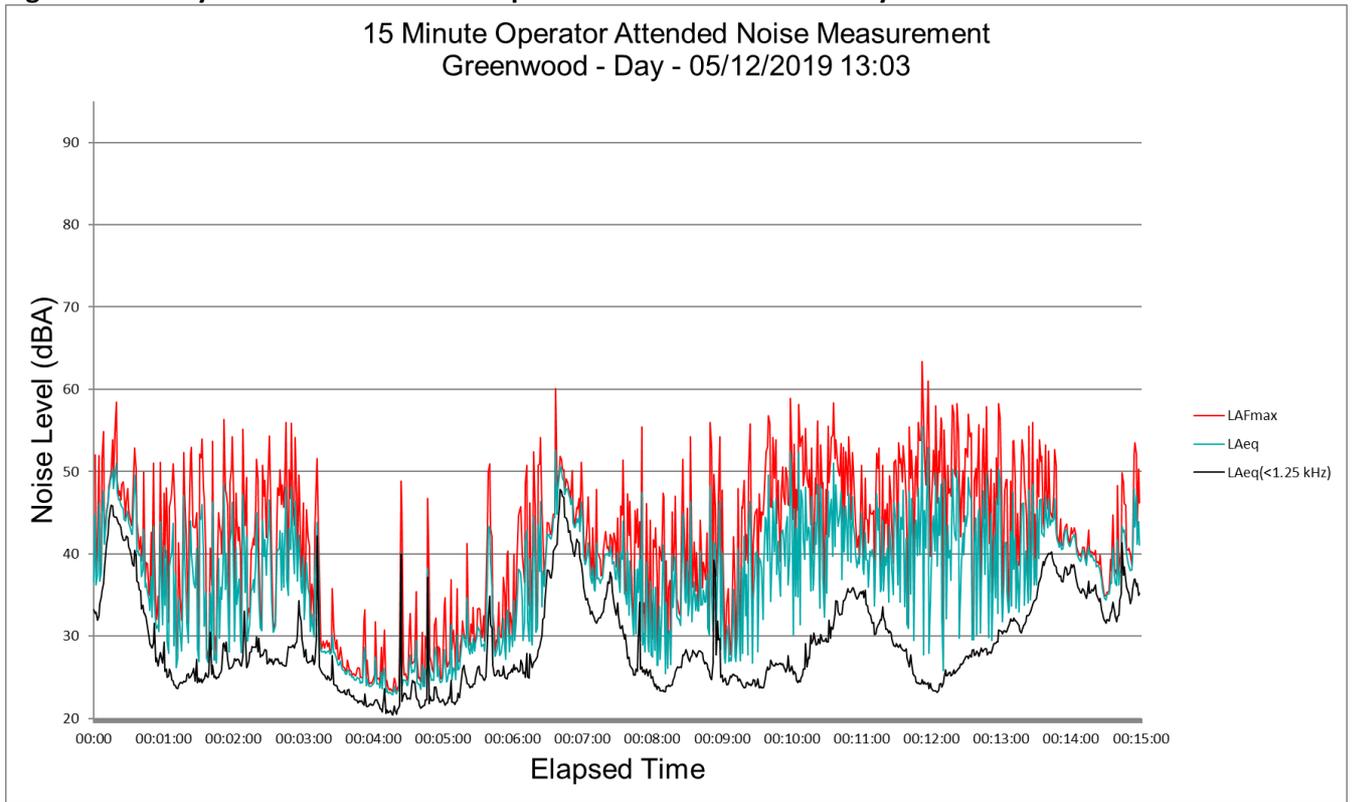

**Figure B20 – Evening Period – ‘Greenwood’ Operator Attended Noise Survey Results**

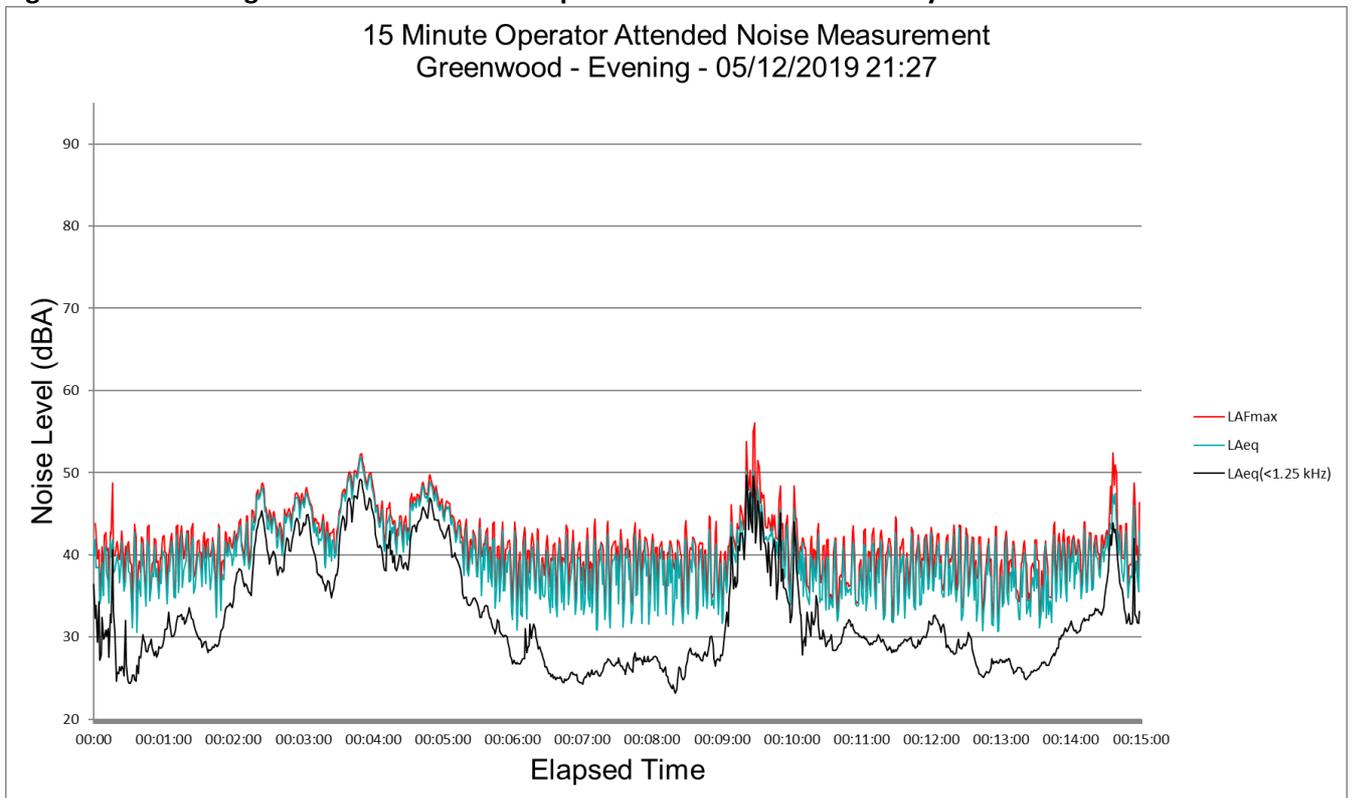

**Figure B21 – Night Period – ‘Greenwood’ Operator Attended Noise Survey Results**

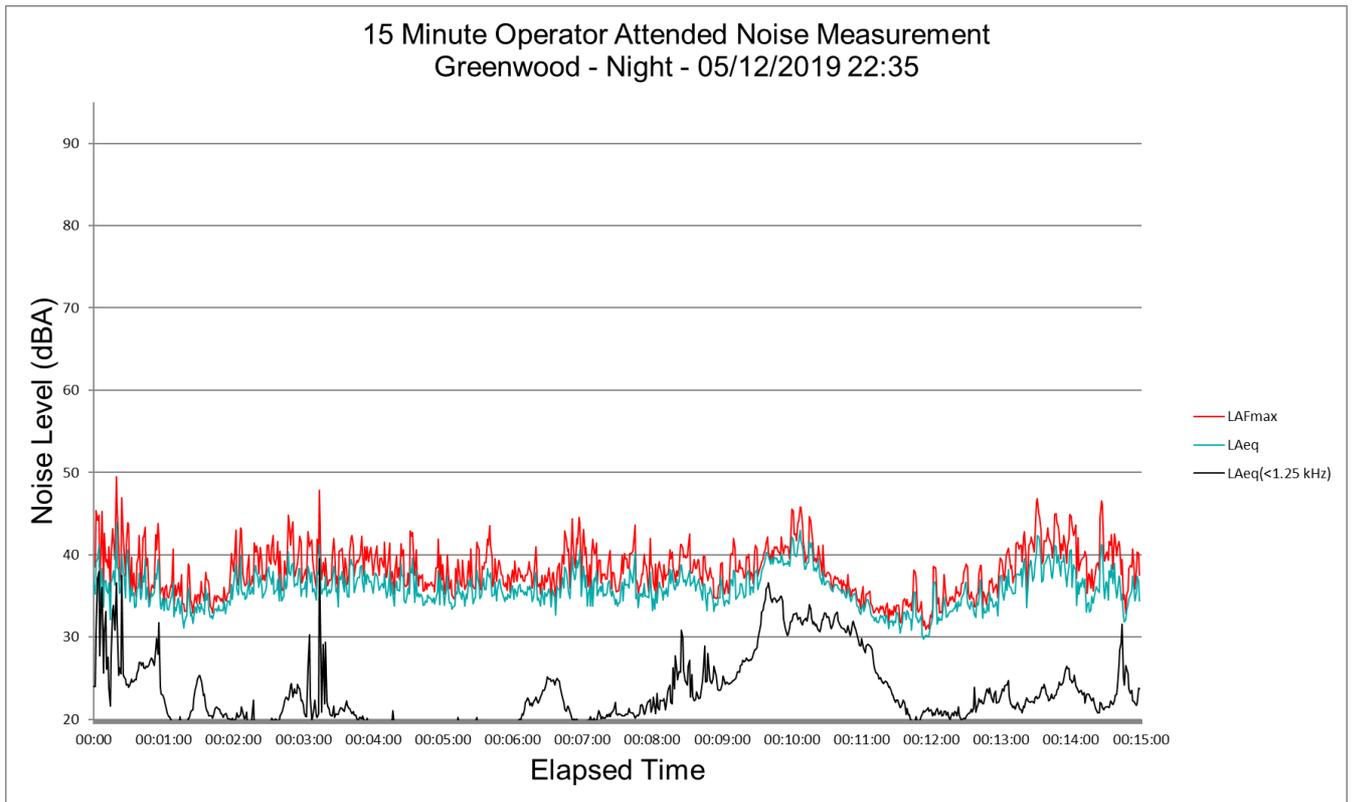

**Figure B22 – ‘RTNM1’ Operator Attended Noise Survey Results**


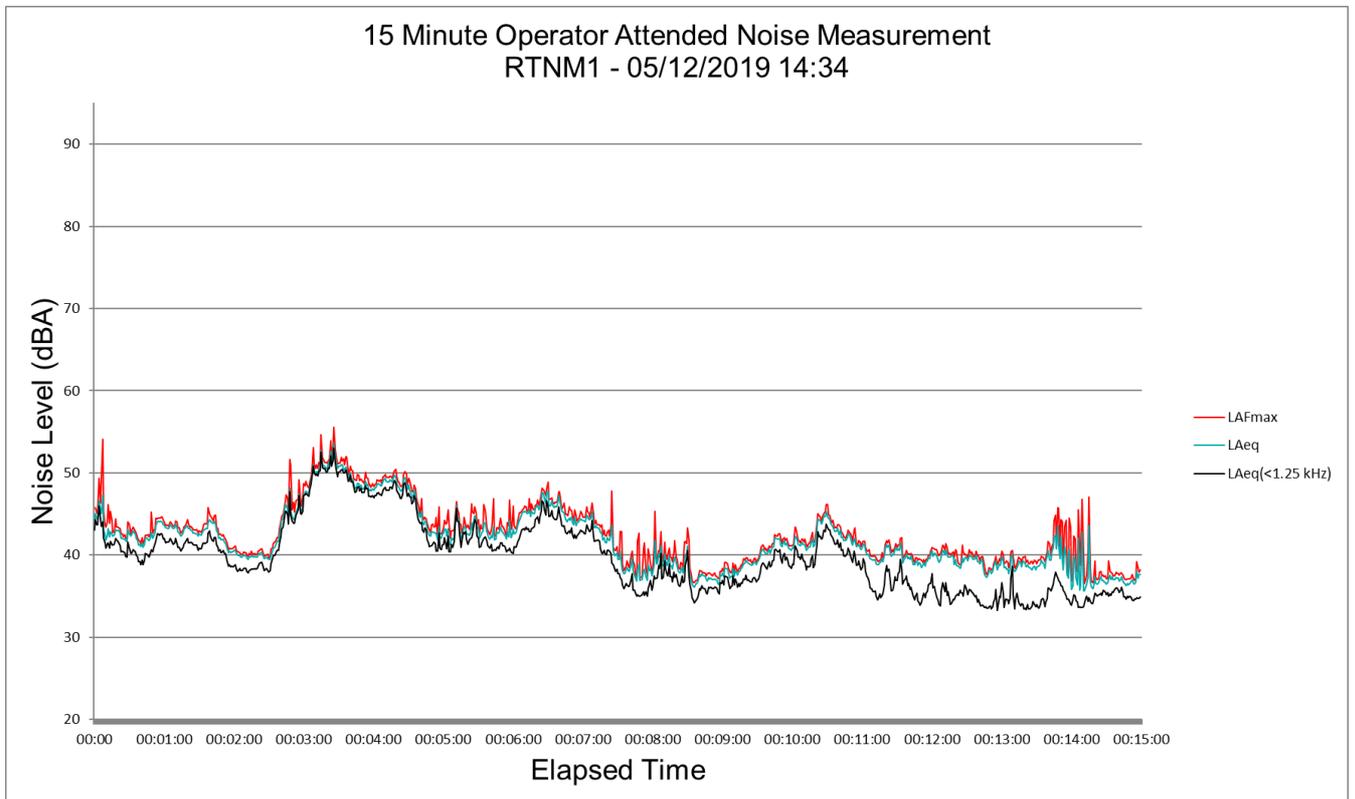


Figure B23 –'RTNM1' Operator Attended Noise Survey Results

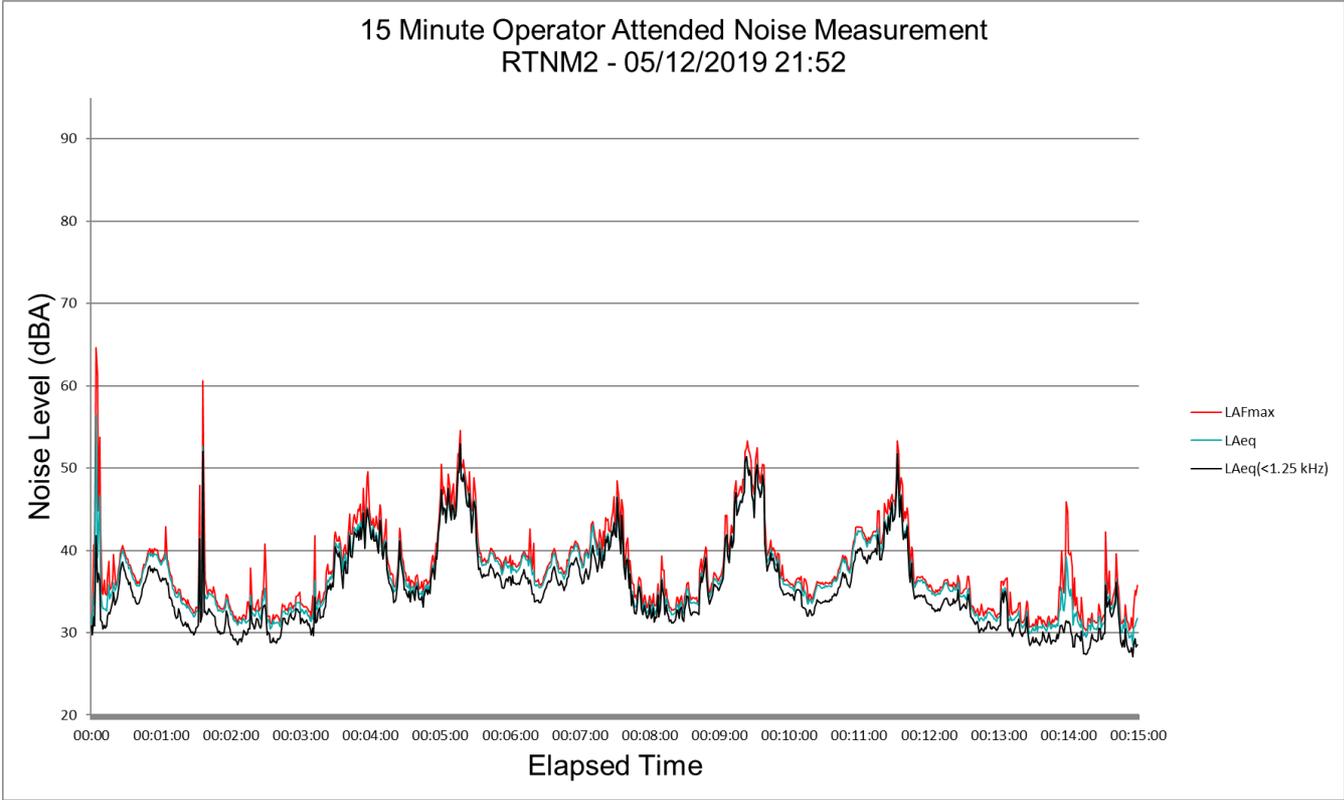

## ASIA PACIFIC OFFICES

### BRISBANE

Level 2, 15 Astor Terrace  
Spring Hill QLD 4000  
Australia  
T: +61 7 3858 4800  
F: +61 7 3858 4801

### MACKAY

21 River Street  
Mackay QLD 4740  
Australia  
T: +61 7 3181 3300

### SYDNEY

2 Lincoln Street  
Lane Cove NSW 2066  
Australia  
T: +61 2 9427 8100  
F: +61 2 9427 8200

### AUCKLAND

68 Beach Road  
Auckland 1010  
New Zealand  
T: +64 27 441 7849

### CANBERRA

GPO 410  
Canberra ACT 2600  
Australia  
T: +61 2 6287 0800  
F: +61 2 9427 8200

### MELBOURNE

Suite 2, 2 Domville Avenue  
Hawthorn VIC 3122  
Australia  
T: +61 3 9249 9400  
F: +61 3 9249 9499

### TOWNSVILLE

Level 1, 514 Sturt Street  
Townsville QLD 4810  
Australia  
T: +61 7 4722 8000  
F: +61 7 4722 8001

### NELSON

6/A Cambridge Street  
Richmond, Nelson 7020  
New Zealand  
T: +64 274 898 628

### DARWIN

5 Foelsche Street  
Darwin NT 0800  
Australia  
T: +61 8 8998 0100  
F: +61 2 9427 8200

### NEWCASTLE

10 Kings Road  
New Lambton NSW 2305  
Australia  
T: +61 2 4037 3200  
F: +61 2 4037 3201

### TOWNSVILLE SOUTH

12 Cannan Street  
Townsville South QLD 4810  
Australia  
T: +61 7 4772 6500

### GOLD COAST

Level 2, 194 Varsity Parade  
Varsity Lakes QLD 4227  
Australia  
M: +61 438 763 516

### PERTH

Ground Floor, 503 Murray Street  
Perth WA 6000  
Australia  
T: +61 8 9422 5900  
F: +61 8 9422 5901

### WOLLONGONG

Level 1, The Central Building  
UoW Innovation Campus  
North Wollongong NSW 2500  
Australia  
T: +61 404 939 922